

SWLR

“THE ARK” EMERGENCY LED REMOTE

IP RATING
65



Approvals:
CSA Certified to C22.2 #141.15
Suitable for damp & wet locations



DESCRIPTION

The SWLR is ideal for wet location, indoor/outdoor, commercial and institutional facilities where appearance and the facility of maintenance are desired. The unit makes it suitable for a variety of applications, including schools, arenas and parking garages. Universal spider knockout pattern stamped into backplate for junction box mounting.

CIRCUITRY

- LED ultra bright light source
- 12 - 24VDC
- 14W LED consumption
- 1300 delivered lumens
- 2 ultra-bright 5000K colour led boards
- Adjustable and lockable LED strips


MECHANICAL

- High quality corrosion, flame and vandal resistant polycarbonate
- Low profile
- IP65 and NSF rated - Suitable for damp & wet locations
- Fully sealed and gasketed enclosure for damp and wet location applications
- Frosted polycarbonate lens
- Junction box knock-out embedded on back plate
- Multiple key hole mounting
- Surface/ceiling mount is standard
- Recessed and T-Bar mountings are optional

DIMENSIONS


STANDARD

Surface wall/ceiling




OPTIONAL


Recessed

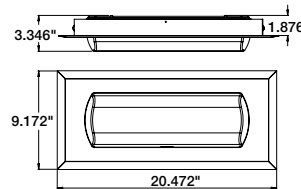

T-Bar

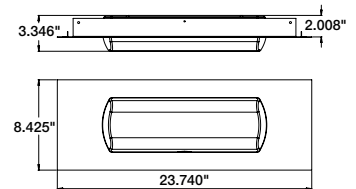

BACK PLATE

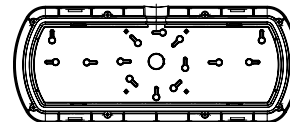

ORDERING GUIDE

SWLR					
Series	Voltage	Wattage	Colour	Mounting	Options
SWLR	12V - 12 VDC 24V - 24 VDC	014 - 14W	GY - Grey WH - White	Blank - Surface/ceiling mount RC - Recessed mount (Backbox must be ordered separately. See below) TB - T-Bar	TP - Tamper proof screws

