

Project/Location:

 Contractor:

 Date:

 Prepared by:

C8ES35 & C8SE35 Series

Bilingual Edge-Lit Sign



FEATURES

- Universal back box designed for surface or recessed mounting on ceilings or walls
- Modular retainer clips allow “snap-in” installation of face panel after installation of back box
- LED Edge-Lit, extruded acrylic face panels with precision-etched lettering
- LED strip design allows for rotation for either ceiling or wall mounting
- Long life, energy-efficient **ALINGAP** technology LED light source reduces maintenance and energy costs
- Energy efficient – consumes less than 8.6W in AC or DC mode
- CSA certified, meets or exceeds CSA 22.2 No. 141 requirements

POWER CONSUMPTION

MODEL	AC SPECS		DC SPECS	
AC/DC red	120 to 347VAC	Less than 8.6W	6 to 48VDC	Less than 4.5W
Self-Powered red	120 to 347VAC	Less than 8.6W	Nickel-Cadmium battery	Min. 30 minutes

TYPICAL SPECIFICATIONS

Supply and install the **Emergi-Lite® C8ES35 or C8SE35 Series** LED Edge-Lit sign. The equipment shall operate with universal two-wire AC input voltage from 120VAC to 347VAC at less than 8.6W and universal 2-wires DC input voltage from 6VDC to 48VDC at less than 4.5W for single and double face signs. The housing assembly shall be fabricated of aluminum and consist of a universal aluminum back box. The back box shall be provided with conduit knockouts on top and back. The trim plate shall have a round shape and shall attach to the housing assembly with two (2) torsion spring retainers thereby eliminating all visible hardware. The LED light strip shall be contained within the trim plate. Red LED technology shall be **ALINGAP**.

The polished acrylic face panel shall have precision-etched 6” high, 3/4” stroke red letters with a white, clear or mirror background, with the words EXIT and SORTIE side by side.


The Exit Sign in a Self-Powered configuration shall stay illuminated during emergency operation for at least 30 minutes upon AC failure. The Exit Sign shall be CSA-C860 and CSA22.2 No. 141 approved.

The equipment shall be **Emergi-Lite®** Model: _____.



DIMENSIONS

Dimensions are approximate and subject to change.

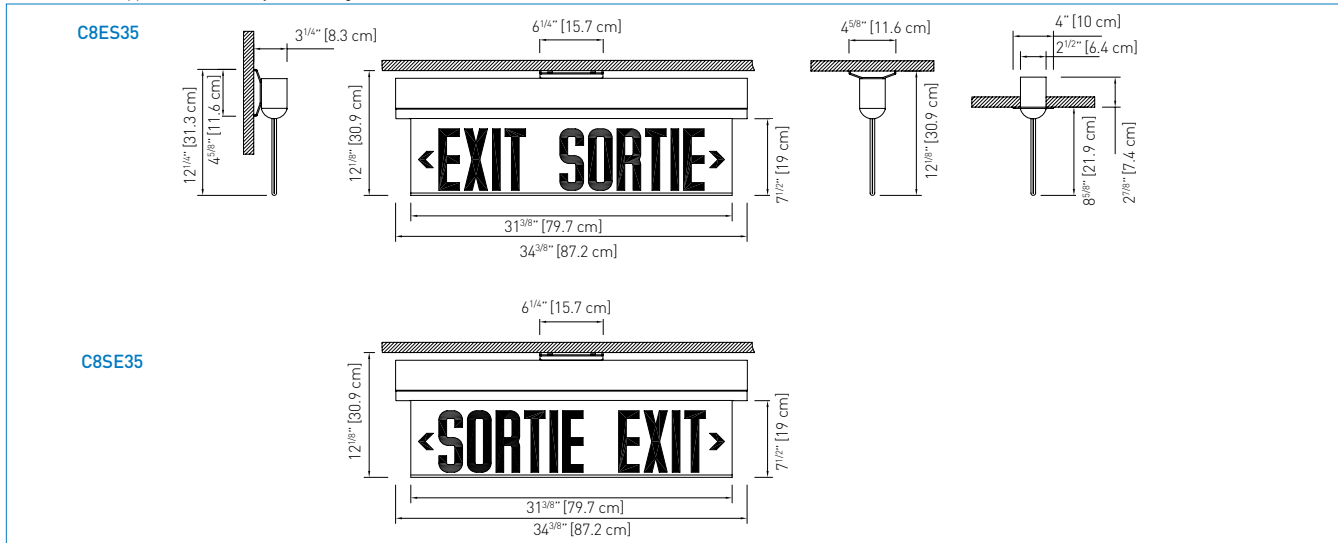

ORDERING INFORMATION

SERIES	FACES	HOUSING COLOUR	POWER SOURCE	FACEPLATE COLOUR	CHEVRONS
C8ES = exit C8SE = sortie	36 = single face 37 = double face 36R = recessed, single face* 37R = recessed, double face*	W = factory white BA = brushed aluminum B = black	-U = universal AC/DC, 6 to 48VDC -I = Self-Powered, 120/347VAC	-RC = red/clear* -RM = red/mirror -RW = red/white	Blank = no chevrons -AL = chevron left -AR = chevron right -DA = double chevrons -A = one chevron each side, double face
	*Consult your sales representative			*Not available on double face.	

EXAMPLE: C8ES36W-I-RC