



C8SR35 Series

Edge-Lit "Sortie" Sign

Project/Location: _____

Contractor: _____

Date: _____

Prepared by: _____

FEATURES

- Universal back box designed for surface or recessed mounting on ceilings or walls
- Modular retainer clips allow "snap-in" installation of face panel after installation of back box
- Extruded acrylic panels with precision-etched lettering legend
- LED strip design allows for rotation for either ceiling or wall mounting
- Long-life, energy-efficient **ALINGAP** technology LED light source reduces maintenance and energy costs
- Energy efficient – consumes less than 5W in AC or DC mode
- Meets or exceeds C860 requirements
- Meets or exceeds CSA22.2 No.141-10



POWER CONSUMPTION

MODEL	AC SPECS		DC SPECS	
AC/DC red	120 to 347VAC	Less than 4.5W	6 to 48VDC	Less than 2.5W
Self-Powered red	120 to 347VAC	Less than 5W	Nickel-Cadmium battery	Min. 60 minutes

TYPICAL SPECIFICATIONS

Supply and install the **Emergi-Lite® C8SR35 Series** LED "SORTIE" Exit Sign.

The equipment shall operate with universal two-wire AC input voltage from 120VAC to 347VAC at less than 4.5W and universal two-wire DC input voltage from 6VDC to 48VDC at less than 2.5W for single or double face legend. The housing assembly shall be fabricated of die-cast aluminum and consist of a universal die cast aluminum back box. The back box shall be provided with conduit knockouts on top, back, and end. The trim plate shall have a round shape and attach to the housing assembly with two (2) torsion spring retainers, thereby eliminating all visible screws or hardware. The LED light strip shall be contained within the trim plate.


Red LED technology shall be **ALINGAP**. The polished acrylic face panel shall have precision etched 6" high, 3/4" stroke red letters with a white, clear or mirror background. For recessed applications, please contact your regional sales representative .

The Exit Sign in a Self-Powered configuration shall stay illuminated during emergency operation for at least 60 minutes upon AC failure. The Exit Sign shall be CSA 860 and CSA22.2 No. 141 approved.

The equipment shall be **Emergi-Lite®** Model: _____ .

DIMENSIONS

Dimensions are approximate and subject to change.

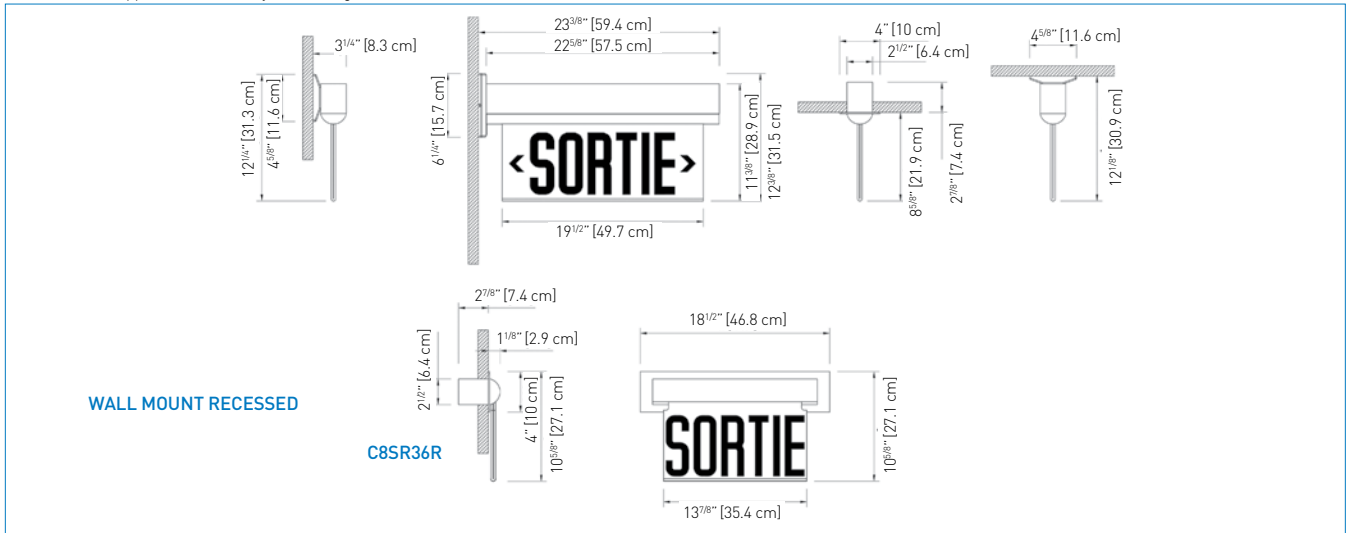

ORDERING INFORMATION

SERIES	HOUSING COLOUR	SUPPLY	FACEPLATE COLOURS	CHEVRONS
C8SR36 = single face C8SR36R = recessed single face wall mount, no chevrons C8SR37 = double face	W = factory white BA = brushed aluminum B = black	-U = universal AC/DC -UI = Self-Powered	-RC = red/clear* -RM = red/mirror -RW = red/white	Blank = no chevrons -AL = chevron left* -AR = chevron right* -DA = double chevron -A = one chevron each side, double face
			*Single face only.	*Not available on double face

EXAMPLE: C8SR36W-U-RC