



C8SRPK-P Series

NEMA-3R Certified Combination Unit

Project/Location:	_____
Contractor:	_____
Date:	_____
Prepared by:	_____

FEATURES

- This unit is ideal for schools, parking garages, public places, transit platforms and security areas such as jails
- Units are NEMA-3R certified
- Gasketed fiberglass housing designed specially for industrial applications
- Sealed, vandal-resistant clear polycarbonate faceplate
- Fully integrated unit with charger and rechargeable battery
- Water and snow resistant, suitable for areas subject to vandalism and wet locations
- Solid state charger circuitry – capable of full recharge within 24 hours
- Low voltage disconnect circuitry
- Sealed, dust-tight transfer relay
- Exit light source is **ALINGAP** technology LED
- Power pack includes a magnetic test switch and a high charge pilot light
- In emergency mode, the long life, sealed nickel battery provides power to the Exit Sign and lamp heads for a minimum of 30 minutes
- CSA certified, meets or exceeds CSA 22.2 No. 141 requirements

TYPICAL SPECIFICATIONS

Supply and install **Emergi-Lite® C8SRPK-P Series** industrial combo unit. The unit shall be fabricated of industrial grade polycarbonate designed specifically for industrial environments. The sealed front cover shall be fabricated of high abuse and vandal-resistant polycarbonate, and feature an evenly illuminated legend. The word "SORTIE" shall be illuminated by long life LEDs consuming less than 1.5W per face. The light source shall be **ALINGAP** technology red LED. The Exit Sign shall be certified NEMA-3R and designed specifically for applications such as high abuse areas, wet locations, environments requiring dust and oil tight equipment or cold temperatures. It shall be designed to provide normal AC illumination and upon AC failure, the Exit Sign and lamp heads shall stay illuminated in emergency mode for a minimum of 30 minutes. The power pack is supplied with a magnetic test switch and a high charge pilot light.

The combo unit shall be CSA-C860 and NEMA-3R certified and meets CSA 22.2 No. 141.

The equipment shall be **Emergi-Lite®** model: _____.

WIRE GUARDS

460.0034-E	Wall Mount
460.0104-E	Ceiling Mount
460.0124-E	Double Face, End Mount



Project/Location:

 Contractor:

 Date:

 Prepared by:


C8SRPK-P Series

NEMA-3R Certified Combination Unit



DIMENSIONS

Dimensions are approximate and subject to change.

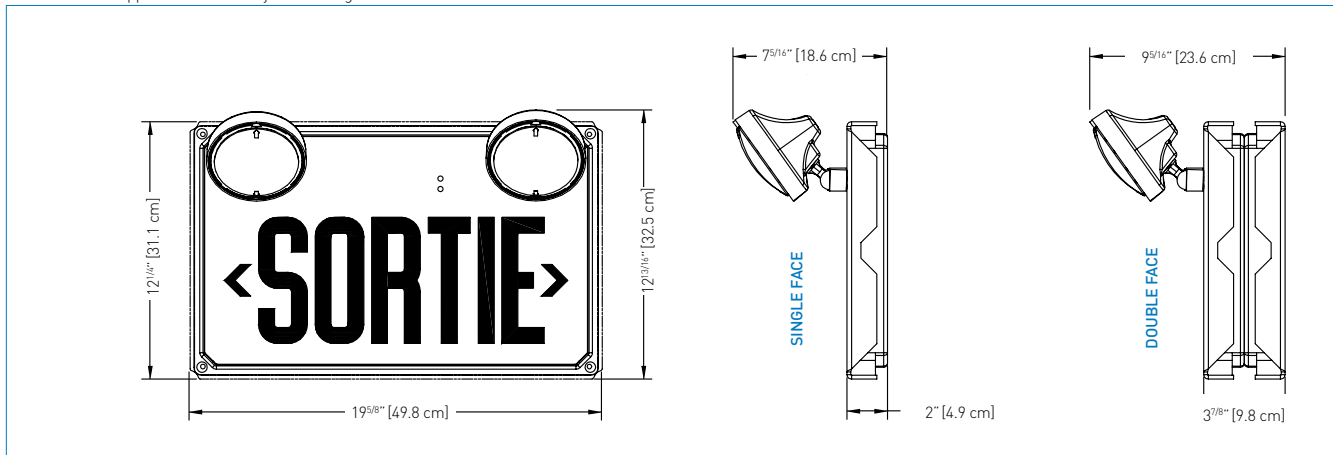

POWER CONSUMPTION AND UNIT RATING

MODEL	AC SPECS		WATTAGE CAPACITY				
			30MIN	1H00	1H30	2H00	4H00
C8SRPK1= single face	120/347VAC	0.15/0.06 A	36	21	15	12	6
C8SRPK2= double face		0.15/0.06 A	72	42	30	24	12

Note: double face models have double the power consumption above

ORDERING INFORMATION

SERIES	VOLTAGE	SUPPLY AND VOLTAGE	NUMBER OF HEADS	LAMP TYPE AND WATTAGE	OPTIONS
C8SRPK1 = sortie, single face C8SRPK2 = sortie, double face	Blank = 120/347VAC	P3 = 6V-36W P7 = 6V-72W	Blank = no heads /1 = one head /2 = two heads	Blank = large tungsten, 6V-9W, wedge base -18 = large tungsten, 6V-18W, DCB -25 = large tungsten, 6V-25W, DCB Q = large halogen, 6V-8W, bi-pin Q12 = large halogen, 6V-12W, bi-pin Q20 = large halogen, 6V-20W, bi-pin H = large halogen, 6V-8W, sealed beam H12 = large halogen, 6V-12W, sealed beam H20 = large halogen, 6V-20W, sealed beam S = large tungsten, 6V-8W, sealed beam S18 = large tungsten, 6V-18W, sealed beam S25 = large tungsten, 6V-25W, sealed beam	FP = lens with teflon coating

EXAMPLE: C8SRPK1P3H