

Project/Location:  
 \_\_\_\_\_  
 Contractor:  
 \_\_\_\_\_  
 Date:  
 \_\_\_\_\_  
 Prepared by:  
 \_\_\_\_\_

# EF18/EF18D/ EF18T Series

Surface Mounted,  
Remote Fixture



## FEATURES

- PAR 36, surface-mounted, large remote fixtures
- Single, double or triple head
- Positive aim swivel
- CSA certified to C22.2 No. 141




## REPLACEMENT LAMPS

MODEL	LAMP TYPE	VOLTAGE/WATTAGE
570.0016-E	Mini tungsten, wedge base	6V-9W
570.0025-E	Mini tungsten, wedge base	12V-9W
580.0023-E	Mini halogen (quartz), bi-pin	24V-20W

For the complete list, please see the lamp chart on pages 156 to 158

## DIMENSIONS

Dimensions are approximate and subject to change.

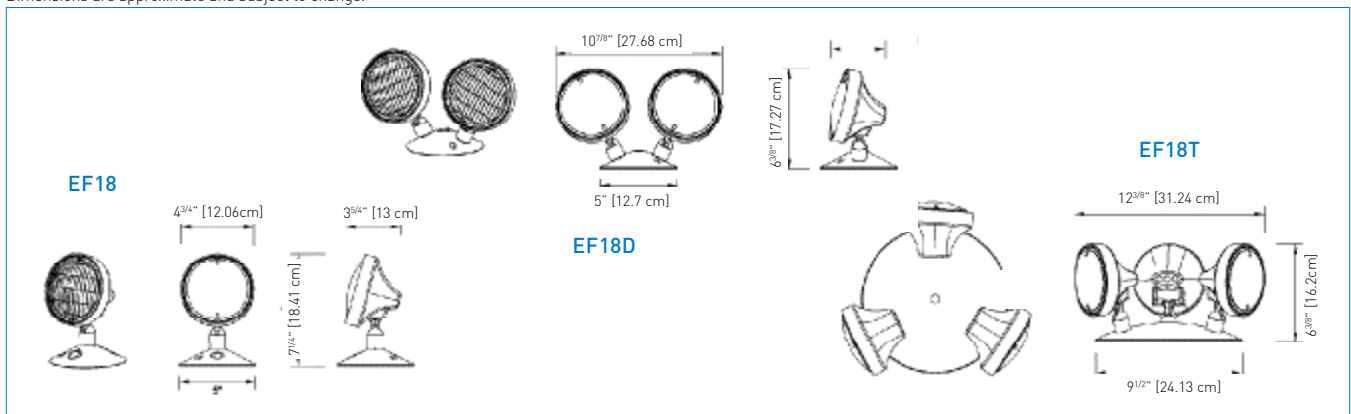

## TYPICAL SPECIFICATIONS

Base and remote head are injection-molded thermoplastic, shockproof and flame retardant. Shall be supplied factory white or black. The setting point shall provide visual indication of the light distribution.

The fixture shall be supplied with a canopy to be installed on any standard octagonal box. The housing shall be designed to allow lamp replacement when required.

The remote unit shall be the **Emergi-Lite®** model: \_\_\_\_\_

## WIRE GUARDS

460.0035-E	Wall Mount (EF18)
460.0082-E	Wall Mount (EF18D)
460.0078-E	Wall Mount (EF18T)

## ORDERING INFORMATION

SERIES	LAMP TYPE	COLOUR	VOLTAGE/WATTAGE/LAMP TYPE	OPTION
EF18= single EF18D= double EF18T= triple	Blank= tungsten Q= halogen S= tungsten sealed beam H= halogen sealed beam	Blank= factory white (PVC) B= black (PVC) C= chrome (metal) M= factory white (metal)	-6V9W= tungsten, 6V - 9W, wedge base -6V__W= tungsten, 6V - 18 or 25W, D.C.B. -12V__W= tungsten, 12V - 9 or 18W, wedge base -12V25W= tungsten, 12V - 25W, D.C.B. -24V__W= tungsten, 24V - 9 or 18W, wedge base -24V25W= tungsten, 24V - 25W, D.C.B. -6V__W= halogen, 6V - 8, 12 or 20W, bi-pin -12V__W= halogen, 12V - 8, 12, 20 or 55W, bi-pin -24V__W= halogen, 24V - 20 or 70W, bi-pin -6V__W= tungsten, 6V - 8, 12, 18 or 25W, sealed beam -12V__W= tungsten, 12V - 12, 18 or 25W, sealed beam -6V__W= halogen, 6V - 8, 12 or 20W, sealed beam -12V__W= halogen, 12V - 8, 12 or 37W, sealed beam -32V__W= tungsten, 32V - 18 or 25W, D.C.B. -120V__W= tungsten, 120V-10 or 15W, D.C.B. -120V35W= halogen, 120V - 35W, D.C.B. -120V50W= halogen, 120V - 50W, D.C.B.	FP= teflon coated lens
			Lamp 50W and above to use metal head only. NOTE : " __ " insert wattage required.	

EXAMPLE: EF18Q-12V12W