



EF25 Series

Weatherproof
Remote Fixture

Project/Location: _____

Contractor: _____

Date: _____


Prepared by: _____

FEATURES

- Quality illumination requires fewer fixtures
- Weatherproof MR16 powder coated cast aluminum light head
- Up to 24V-50W
- Available single or double head
- Preinstalled on a Red Dot® weatherproof junction box:
 - Five Outlets, 4¹/₈" Diameter
 - Copper-free aluminum provides increased corrosion resistance
 - Precision cast and machined surfaces permit safer wire pulling
 - Clean cover edges provide good gasket sealing
 - Precision NPT threads allow trouble-free field installation for rigid, IMC or EMT conduit
 - Deep slotted stainless steel cover screws for faster installation
- For use with 6V, 12V or 24V DC MR16 or 12V-5W LED lamps

DIMENSIONS

Dimensions are approximate and subject to change.

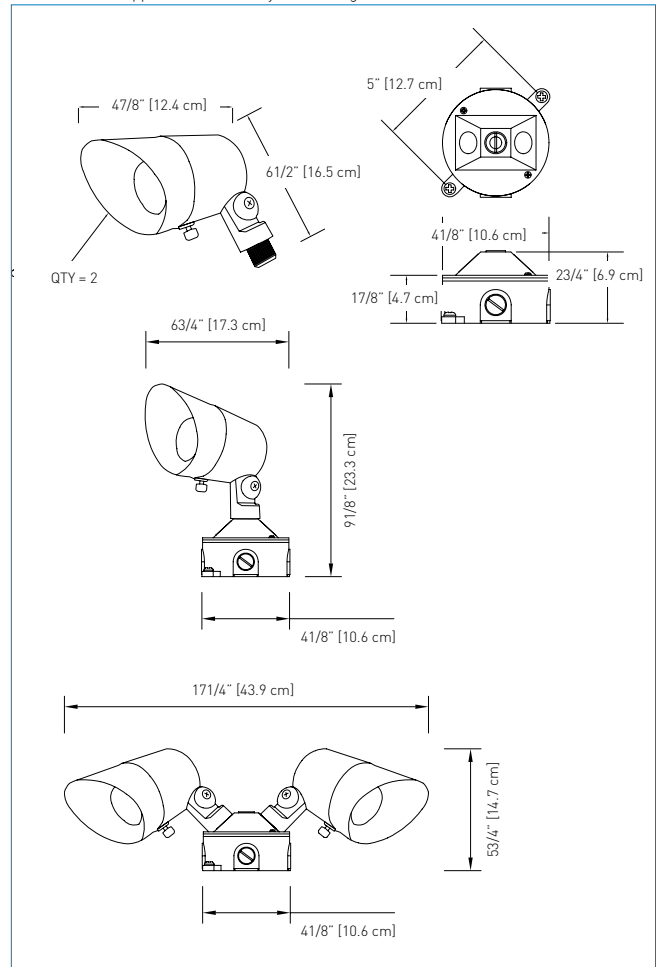

REPLACEMENT LAMPS

MODEL	LAMP TYPE	VOLTAGE-WATTAGE
580.0079-E	MR16 flood	6V-10W
580.0080-E	MR16 flood	12V-12W
580.0070-E	MR16 flood	24V-12W
580.0100-E	MR16 LED	24V-6W
580.0104-E	MR16 LED	12V-5W

For the complete list, please see the lamp chart on pages 156 to 158

ORDERING INFORMATION

SERIES	# OF HEADS	COLOUR	LAMP VOLTAGE	WATTAGE
EF25= weatherproof remotes	Blank= single head D= double head	Blank= standard color black head/grey junction box	-6V= 6VDC -12V= 12VDC -24V= 24VDC	LA= MR16 LED, 6V-4W LG= MR16 LED, 12V-4W LI= MR16 LED, 12V-5W LJ= MR16 LED, 12V-6W LL= MR16 LED, 24V-4W LM= MR16 LED, 24V-6W 6W= MR16 halogen, 6V-6W 10W= MR16 halogen, 6V-10W 12W= MR16 halogen, 12, 24V-12W 20W= MR16 halogen, 12, 24V-20W 35W= MR16 halogen, 12, 24V-35W 50W= MR16 halogen, 12, 24V-50W 20WH= MR16-IR, 12V-20W, high output 35WH= MR16-IR, 12V-35W, high output 50WH= MR16-IR, 12V-50W, high output

EXAMPLE: EF25-6V10W