



NEW features

EHC SERIES

Pictogram Combo, Hazardous Locations: Class I Div 2, Class II Div 1&2 and Class III

Type: _____
 Project/Location: _____
 Contractor: _____
 Prepared By: _____
 Date: _____
 Model No.: _____

FEATURES

- Includes the addition of Class II Div 1&2 Groups E, F and G as well as Class III ratings
- Certified Class I Div 2, Groups A, B, C and D as per CSA C22.2 No.137-M1981
- Certified temperature Codes for several types of emergency lamps
- Certified CSA C22.2 No.141-10
- Polyvinyl chloride frame, with built-in gasket to prevent water infiltration
- Heavy-duty 1/8" thick aluminum back plate with keyholes for wall-mount installation
- Sealed, vandal-resistant faceplate of polycarbonate
- Legend illuminated by long-life white LEDs
- Comes standard with two pictogram films for direction selection
- Two high-performance MR16 LED lamps shielded by a clear polycarbonate cover
- 5W LED emergency lights provide 60 ft of egress illumination on a 6-foot wide path
- 6W LED emergency lights provide 100 ft of egress illumination on a 6-foot wide path
- Sealed, maintenance-free Lead-Calcium or Nickel-Cadmium batteries
- Remote load capacity: covers with LED lights 200 ft up to 500 ft of egress illumination
- Comes standard with auto-diagnostic
- Cold-weather option: -40°C with only 14W extra power consumption

TYPICAL SPECIFICATIONS

Supply and install **Emergi-Lite® EHC Series** combination emergency light battery unit and pictogram sign. Designed specifically for hazardous locations, the equipment frame shall be of industrial grade polyvinyl chloride with gaskets around both sides of the frame contour. The back plate shall be made of 1/8" thick aluminum sheet and shall include knock-outs for installation on an electrical box and four keyholes for alternative installation on a wall surface. The faceplate shall be constructed of heavy-duty vandal-resistant clear polycarbonate and feature a uniformly illuminated pictogram legend.

The unit shall come standard with two legend films for pictogram and direction selection. The light source shall be long-life white light-emitting diodes (LED). The unit shall have attached a lower compartment containing two emergency heads with adjustable swivels and long-life MR-16 LED lamps of ___ V and ___ W. The heads shall be installed on a shield housing made of cast aluminum and protected by a shock-absorbent, clear polycarbonate cover. The standard AC input voltage shall be 120/347VAC. The equipment shall be equipped with a magnetic test switch and one LED pilot light protected by the face plate.

The unit shall perform auto-test functions managed by a micro-controller and shall automatically self-test for one minute every 30 days, 10 minutes in the 6th month and 30 minutes annually. When a fault is detected, the bi-color pilot light shall turn from green to red and flash following a particular code. The code description shall be displayed on a label next to the pilot light to identify the failure type: battery, charger circuitry, LED lights for the signage, or emergency lights. The combination unit shall be approved CSA C22.2 No.141-10 and No.137-M1981 for Class I Division 2 Groups A, B, C and D, Class II Division 1&2 Groups E, F and G as well as Class III.

Equip the **Emergi-Lite®** Model: _____




TEMPERATURE CODES (CLASS I DIVISION 2)

LAMP RATING	TEMPERATURE CODE	MAX. TEMPERATURE	REPLACEMENT LAMP
6V-10W	T3C	160°C	580.0079-E
12V-12W	T3A	180°C	580.0080-E
12V-20WH	T2D	215°C	580.0068-E
6V-4W LED	T4A	120°C	580.0097-E
12V-4W LED	T4A	120°C	580.0093-E
12V-5W LED	T4A	120°C	580.0104-E
12V-6W LED	T4	135°C	580.0106-E

Type: _____
 Project/Location: _____
 Contractor: _____
 Prepared By: _____
 Date: _____
 Model No.: _____


EHC SERIES

Pictogram Combo, Hazardous Locations: Class I Div 2, Class II Div 1&2 and Class III



DIMENSIONS

Dimensions are approximate and subject to change.

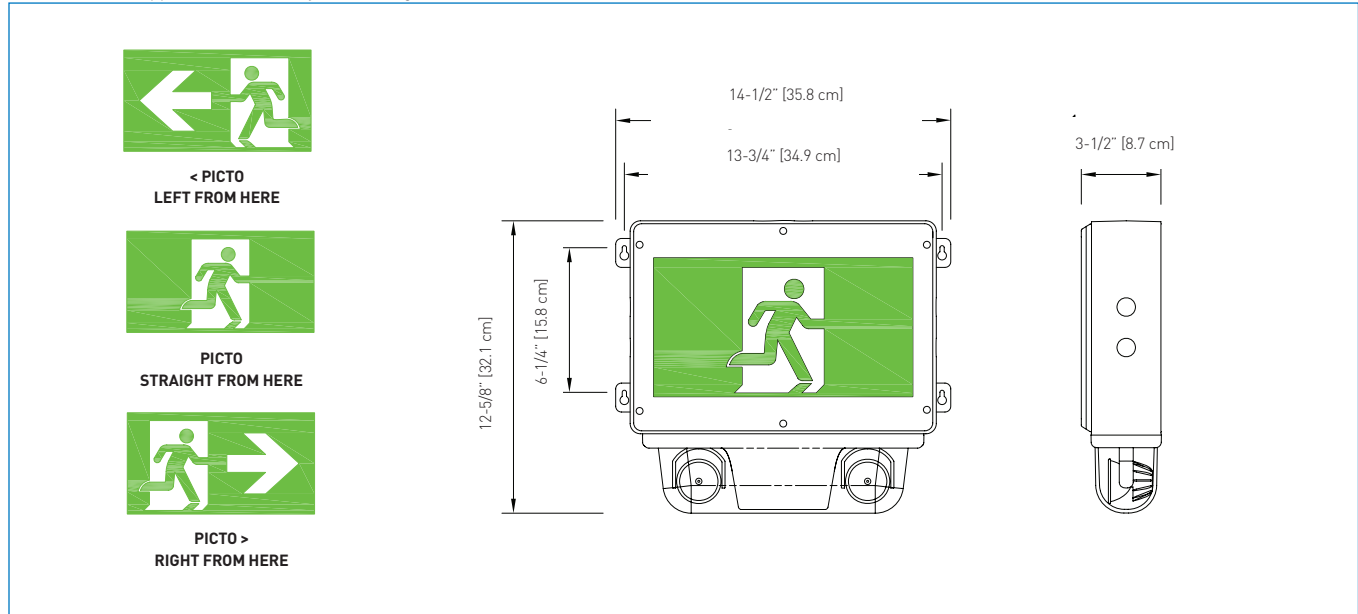

POWER CONSUMPTION

MODEL	AC SPECS		EMERGENCY POWER AVAILABLE FOR LAMPS				
			30MIN	1H00	1H30	2H00	4H00
pictogram sign module	120/347VAC	less than 2.5W	-	-	-	-	-
EHC-6L36		0.10/0.03 A	36	21	15	12	-
EHC-6L36-CW		0.25/0.08 A	36	21	15	12	-
EHC-6N36		0.10/0.03 A	36	30	20	16	8
EHC-6N36-CW		0.25/0.08 A	36	30	20	16	8
EHC-12N60		0.18/0.06 A	60	40	30	20	10

ORDERING INFORMATION

SERIES	HOUSING COLOUR	BATTERY TYPE AND POWER	HEAD STYLE AND WATTAGE	OPTIONS
EHC= pictogram combo	G= grey	6L36= 6V-36W, lead-calcium 6N36= 6V-36W, NiCad 12N60= 12V-60W, NiCad	Blank= no heads* LA= MR16 LED, 6V-4W LG= MR16 LED, 12V-4W LI= MR16 LED, 12V-5W LJ= MR16 LED, 12V-6W MK= MR16 halogen, 12V-12W MW= MR16-IR, 12V-20W, high output	Blank= auto-diagnostics, non-audible (standard) -2= 120/277VAC input U= auto-diagnostics, audible NEX= NEXUS® system interface* NEXRF= wireless NEXUS® system interface* CW= cold-weather -40°C (only 6V units) D1= time delay (5 mins.) D2= time delay (10 mins.) D3= time delay (15 mins.)
			* Remote load must be connected.	* Not all options available with NEXUS® System. Please consult your sales representative

EXAMPLE: EHC6N36LD1