

Project/Location:

 Contractor:

 Date:

 Prepared by:

EX3 Series

Aluminum Slim
Edge-Lit Exit Sign



FEATURES

- Extruded aluminum housing
- Die-Cast aluminum E22 canopy
- Universal surface mounting: wall, ceiling or end mount
- Click-to-open housing door allows easy access to the panel and electrical wiring
- Acrylic panel with curved contour
- Legend with 6" letters and easy to add-on directional indicators
- Simple, two-wire universal AC input (120V to 347VAC 50/60Hz) prevents installation errors
- Simple, two-wire universal DC input: 6V to 24VDC
- Energy efficient power consumption: less than 1.5W in AC or DC mode
- Meets or exceeds CSA 22.2 No.141-10



TYPICAL SPECIFICATIONS

Supply and install the **Emergi-Lite® EX3 Series** LED slim-profile Edge-Lit Exit Sign. The unit shall operate with universal two-wire AC input voltage from 120VAC to 347VAC at less than 1.5W and universal two-wire DC input voltage from 6VDC to 24VDC at less than 1.5W for single and double face legends.

The housing assembly shall be fabricated of extruded aluminum with a textured finish and _____ colour. The canopy shall be of die-cast aluminum and allow for ceiling, wall, or end mount installation. The light source shall be ten (10) long-life LEDs installed on a PCB strip. Red LED technology shall be **ALINGAP**. The acrylic panel shall have a curved contour.

The legend shall have 6" high, 3/4" stroke red letters on a clear background, unless otherwise specified. The unit shall be equipped with stick-on translucent directional indicators, to be installed in the field as required by the code.

The Exit Sign in a Self-Powered configuration shall be equipped with sealed Nickel-Cadmium batteries and will provide a minimum of 90 minutes of emergency illumination upon AC failure.

The equipment shall be CSA 22.2 No.141-10 approved.


The equipment shall be **Emergi-Lite®** Model: _____.

POWER CONSUMPTION

MODEL	AC SPECS		DC SPECS	
AC/DC red	120 to 347VAC	Less than 1.5W	6 to 24VDC	Less than 1.5W
AC/DC green	120 to 347VAC	Less than 2W	6 to 24VDC	Less than 1.5W
Self-Powered red	120 to 347VAC	Less than 2.5W	Nickel-Cadmium battery	Min. 90 minutes
Self-Powered green	120 to 347VAC	Less than 3W	Nickel-Cadmium battery	Min. 90 minutes

DIMENSIONS

Dimensions are approximate and subject to change.

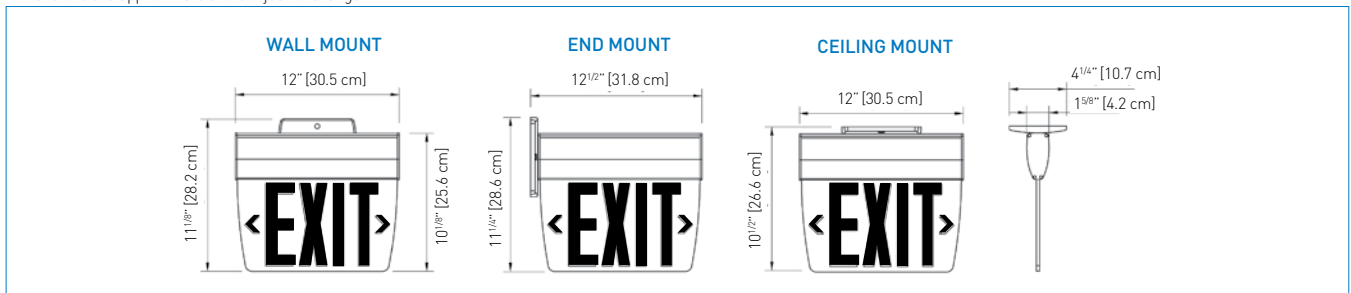

ORDERING INFORMATION

SERIES/FACES	HOUSING COLOUR	VOLTAGE	FACEPLATE COLOURS
EX38= single face EX39= double face	TA= textured aluminum OW= off-white Other colours available, Consult your sales representative.	-AC= AC only -U= AC/DC -UI= Self-Powered (90 minutes) -EM120-2W= 120VAC, 120VDC, 2 wires	-RC= red/clear* -RW= red/white -RM= red/mirror -GC= green/clear* -GM= green/mirror *Not available on double face.

EXAMPLE: EX38TA-U-RC