

Project/Location:

 Contractor:

 Date:

 Prepared by:

EX3F Series

Low-Profile Recessed
Edge-Lit Exit Sign




FEATURES

- Rugged, 20-gauge steel back box
- Equipped with bar hanger kit for easy installation
- Formed steel flat trim plate
- Choice of finishes: textured aluminum or off-white
- Acrylic panel with curved contour provides superior clarity and illumination
- Legend with 6" letters and easy to add-on directional chevrons
- Choice of legend background: clear, white or mirror
- Simple, two-wire universal AC input (120V to 347VAC 50/60Hz) prevents installation errors
- Simple, two-wire universal DC input: 6V to 24VDC
- Long-life LED light source of **ALINGAP** technology assures low maintenance costs
- Energy-efficient power consumption: less than 1.5W in AC or DC mode
- Self-Powered models provide 90 minutes of emergency illumination
- CSA certified, meets or exceeds C860-01 and NRCAN/C860-01 requirements
- Meets or exceeds CSA22.2 No. 141-10

DIMENSIONS

Dimensions are approximate and subject to change.

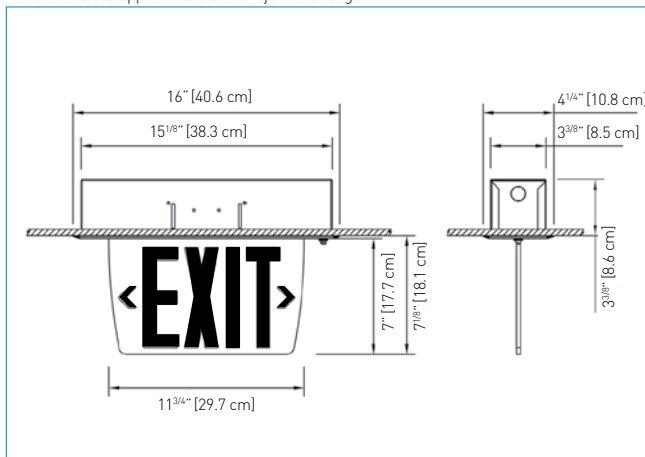

TYPICAL SPECIFICATIONS

The **Emergi-Lite® EX3F Series** combines a low-profile modular design with state-of-the-art technology and ease of installation. Elegantly discreet, these Exit Signs complement interior designs while providing mounting versatility and energy efficiency.

Supply and install the **Emergi-Lite® EX3F Series** LED low-profile recessed Edge-Lit Exit Sign. The unit shall operate with universal two-wire AC input voltage from 120VAC to 347VAC at less than 1.5W and universal two-wire DC input voltage from 6VDC to 24VDC at less than 1.5W for single and double face legends. The housing assembly shall be of rugged 20-gauge steel and shall include a bar hanger kit for easy installation. The trim plate shall be low-profile and manufactured of formed steel with a textured finish and _____ colour. The light source shall be eight (8) long-life LEDs installed on a PCB strip. Red LED technology shall be **ALINGAP**. The whole electrical circuit shall be contained in a plastic housing fixed on the trim plate. The acrylic panel shall have a curved contour. The legend shall have 6" high, 3/4" stroke red letters on a clear background, unless otherwise specified. The unit shall be equipped with stick-on translucent directional indicators, to be installed in the field as required by the Code.

The Exit Sign in a Self-Powered configuration shall be equipped with sealed Nickel-Cadmium batteries and will provide a minimum of 90 minutes of emergency illumination upon AC failure.

The equipment shall be CSA-C860 and NRCAN/C860-01 approved. CSA22.2 No. 141-10

The equipment shall be **Emergi-Lite®** Model: _____

POWER CONSUMPTION

MODEL	AC SPECS	DC SPECS		
AC-only	120 to 347VAC	Less than 1.5W	-	
AC/DC-remote	120 to 347VAC	Less than 1.5W	6 to 24VDC	Less than 1.5W
Self-Powered	120 to 347VAC	Less than 2.5W	Nickel-Cadmium battery	Min. 90 minutes

ORDERING INFORMATION

SERIES / FACES	HOUSING COLOUR	VOLTAGE	PANEL COLOUR
EX38F= single face EX39F= double face	TA= textured aluminum OW= off-white	-U= AC/DC -AC= AC Only -UI= Self-Powered (90 Minutes)	-RC= red/clear* -RW= red/white -RM= red/mirror -GC= green/clear* -GM= green/mirror

*Single face only.

EXAMPLE: EX38FTA-U-RC