



Simplicity™ LSR2000 Series Edge-Lit “Sortie” Sign

Type: _____
 Project/Location: _____
 Contractor: _____
 Prepared By: _____
 Date: _____
 Model No.: _____

FEATURES

- Universal back box designed for surface or recessed mounting on ceilings or walls
- Modular retainer clips allow “snap-in” installation of face panel after installation of back box
- Acrylic panels with precision-etched lettering legend
- LED strip design allows for rotation for either ceiling or wall mounting
- Long-life LED light source of **ALINGAP** technology assures low maintenance cost and is warranted for ten (10) years
- Energy efficient – consumes less than 5W in AC or DC mode
- Meets or exceeds CSA22.2 No.141-15

See warranty details at: www.tnb.ca/en/brands/lumacell




POWER CONSUMPTION

MODEL	AC SPECS		DC SPECS	
AC/DC red	120 to 347VAC	Less than 4.5W	6 to 48VDC	Less than 2.5W
Self-Powered red	120 to 347VAC	Less than 5W	Ni-Cd battery	Min. 60 minutes

DIMENSIONS

Dimensions are approximate and subject to change.

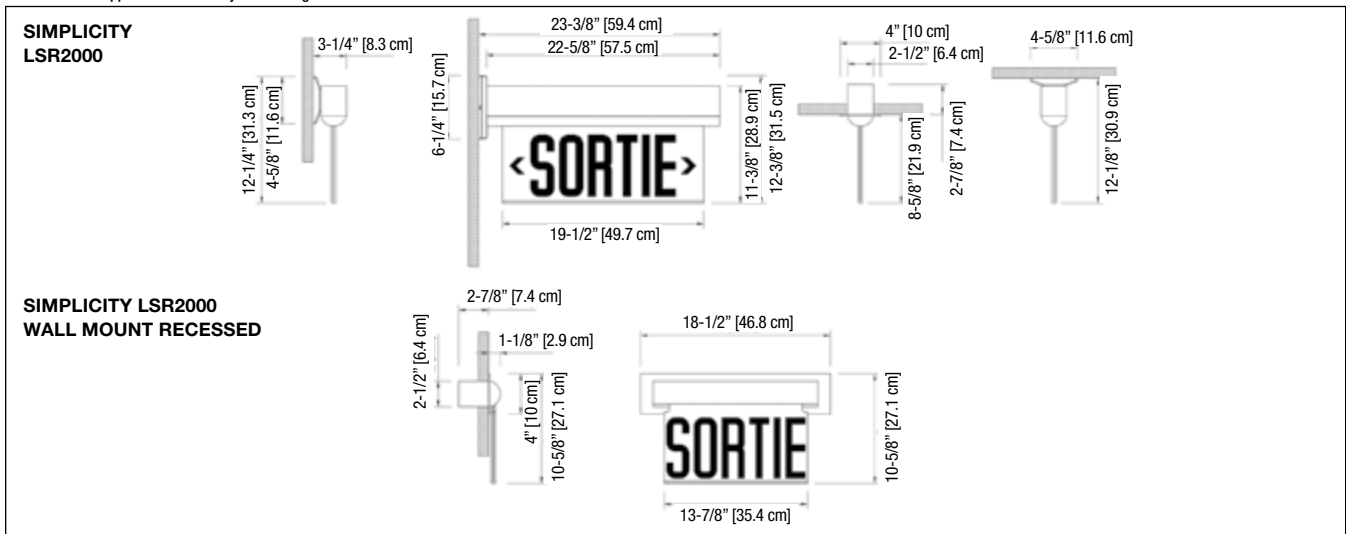

TYPICAL SPECIFICATIONS

Supply and install the Lumacell® SIMPLICITY LSR2000 Series LED “SORTIE” Exit Sign.

The equipment shall operate with universal two-wire AC input voltage from 120VAC to 347VAC at less than 4.5W and universal two-wire DC input voltage from 6VDC to 48VDC at less than 2.5W for single or double face legend. The housing assembly shall be fabricated of Die-Cast aluminum and consist of a universal die cast aluminum back box. The back box shall be provided with conduit knockouts on top, back, and end. The trim plate shall have a round shape and attach to the housing assembly with two (2) torsion spring retainers, thereby eliminating all visible screws or hardware. The LED light strip shall be contained within the trim plate.

Red LED technology shall be **ALINGAP**. The polished acrylic face panel shall have precision etched 6” (15cm) high and 3/4” (1.9cm) stroke red letters with a white, clear or mirror background. For recessed applications, please contact your regional sales office.

The Exit Sign in a Self-Powered configuration shall stay illuminated during emergency operation for at least 60 minutes upon AC failure.

The Exit Sign shall be CSA 22.2 No.141-15 certified.

The equipment shall be Lumacell® Model: _____

ORDERING INFORMATION

SERIES	FACES	CHEVRONS	APPROVAL	HOUSING COLOURS	PANEL COLOUR	VOLTAGE
LSR20	0= single face 3= double face	1= no chevrons 1R= no chevrons, wall mount recessed model* 2= double chevrons 3= chevron right* 4= chevron left* 3-4= one chevrons, each side double face * Not available on double face.	C860	A= brushed aluminium B= black W= factory white	RC= red/clear* RM= red/mirror RW= red/white * Single face only.	Blank= 120 to 347VAC, 6 to 48VDC SP= Self-Powered, 120 to 347VAC

EXAMPLE: LSR2001RC860WR