

RMH

HAZARDOUS LOCATION

Class I, Division II / Zone 2 Group C + D

AC, AC/DC & Self-Powered

120/347VAC Input



Approvals:

CSA C860 Approved and CSA C22.2 #137 Hazardous Location
Approved Class I, Division II / Zone 2, Groups C and D.
CSA C22.2 #141.15 Performance Certified



(self powered version)

DESCRIPTION

The RMH series of Class I, Division II / Zone 2 rated running man are designed to perform in demanding hazardous applications. The unit maintains its sealed interior with a continuous integral gasket. As well LED pilot light and test switch are sealed type.

ELECTRICAL - AC/DC

- LED ultra bright light source
- 120/347VAC Input, field selectable
- 3.6 Watt power consumption single face
- Emergency DC wattages as follows:
6VDC = 1.8W 12VDC = 1.8W 24VDC = 1.8W


ELECTRICAL - SELF-POWERED

- LED ultra bright light source
- 120/347VAC Input, field selectable
- 4 Watt power consumption single face
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration (standard)
- Solid state transfer and battery charger

MECHANICAL

- Heavy-duty non-metallic, reinforced construction
- One piece, molded and gasketed lens
- Bottom hinged cover secured with two screws
- One-way breather valve for release of gases and/or moisture condensation
- All external metal hardware is stainless steel
- Single face, wall mount only
- Grey finish housing, white faceplate standard

DIMENSIONS

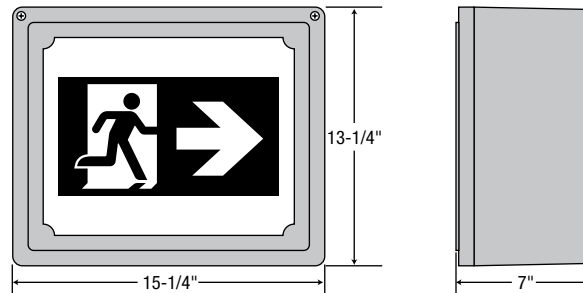

Comes standard with three pictogram legends for direction selection.

ORDERING GUIDE

RMH	1	GY	
Series	Nbr of faces	Colour	Operation
RMH	1 - Single face	GY - Grey	UDC - 6, 12, 24 universal DC IB - Self-powered for 90 minutes

TEMPERATURE CODES

UDC	IB
T6	T5