

RMQ

THIN RUNNING MAN SERIES Die Cast Aluminum


Approvals:

CSA Certified to C22.2 #141.15 and C860


DESCRIPTION

RMQ series of commercial decorative die cast aluminum exit signs are the perfect match of aesthetics and durability. The die cast construction produces an extremely rigid housing while the highly machined brushed housing lends a high-end look. The series has been designed to meet the C860 standard using energy efficient LEDs, with energy consumption as low as 1.8W AC. Faceplates are hinged and snap into place for ease of installation.

CIRCUITRY – AC & AC/DC

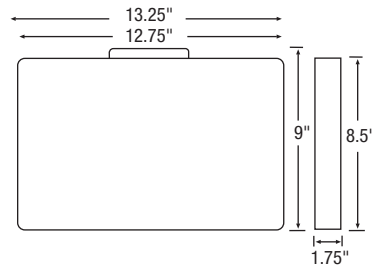
- LED ultra bright light source
- 120/347VAC input voltage, field selectable
- 1.8W power consumption single, double face
- Emergency DC Wattages as follows:
6VDC = 1.0W 12VDC = 1.5W 24VDC = 3.5W

CIRCUITRY – SELF-POWERED

- LED ultra bright light source
- 120/347VAC input voltage, field selectable
- 1.8 W power consumption single, double face
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration (standard)
- Solid state transfer and battery charger

MECHANICAL

- Die cast aluminum, rigid housing construction
- Faceplates are hinged and snap into place for ease of installation
- Universal faces
- Universal spider knockout pattern stamped into back plate for junction box mounting
- Universal models include ceiling or end mount, field installable canopy kit
- Other colours are available, including custom colour matching and brushed aluminum

DIMENSIONS


Comes standard (single face) with three pictogram legends for direction selection.



Comes standard (double face) with two pictogram legends.



For double face no arrow options, select "0" on the options column.

ORDERING GUIDE

Series	Nbr of faces	Frame/back plate colour	Face colour	DC Voltage	Options [†]
RMQ	1 - Single 2 - Double	WH - White (standard) BK - Black BA - Brushed aluminum	WH - White (standard) BK - Black BA - Brushed aluminum	NDC - AC only UDC - Universal DC backup voltage 6, 12 or 24VDC selectable IB - Self-powered for 90 minutes	TP, WG*, PG 0 - No indicators (double face only) ↓ ↑ ↗ ↘ ↙ ↘ D U UR DR DL UL Note: Indicators option available for single & double option only

[†] For detailed options descriptions, please consult the options page.

* Specify mounting.