



Sprinter S12V170 data sheet



Drawing:

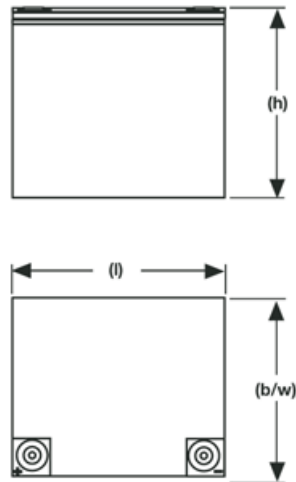

Terminal:



Specifications:

Exide type designation	Part number	Nom. Voltage V	Power 15min VpC 20°C W/cell	Power 15min 1.67 VpC 25°C W/cell	Length l max. mm	Width b/w max. mm	Height h1 max. mm	Height over terminals h2 max. mm	Weight approx. kg	Internal resistance mOhm	Short circuit current A	Terminal
S12V170	NASR120170HP0FA	12	158	167	198.0	167.0	178.0	189.0	16.40	5.3	2341	F-M6

Part numbers not valid for North America, use type for ordering!

Constant-power discharge in W/cell (@ 25 °C):

Part number	Exide type designation	VpC	5min	10min	15min	20min	30min	45min	1h	1.5h
NASR120170HP0FA	S12V170	1.85	248.0	179.0	143.0	119.0	90.0	67.0	53.0	38.0
NASR120170HP0FA	S12V170	1.80	280.0	197.0	155.0	129.0	97.0	71.0	56.0	40.0
NASR120170HP0FA	S12V170	1.75	302.0	208.0	162.0	134.0	100.0	73.0	58.0	41.0
NASR120170HP0FA	S12V170	1.70	318.0	214.0	165.0	136.0	101.0	73.0	58.0	41.0
NASR120170HP0FA	S12V170	1.67	323.0	215.0	167.0	137.0	102.0	74.0	58.0	41.0
NASR120170HP0FA	S12V170	1.65	326.0	216.0	167.0	137.0	102.0	74.0	58.0	41.0
NASR120170HP0FA	S12V170	1.60	332.0	218.0	168.0	138.0	102.0	74.0	58.0	41.0
NASR120170HP0FA	S12V170	1.50	335.0	220.0	170.0	139.0	103.0	75.0	59.0	42.0

