

# SLESE-SLSEE

## EDGELIT BILINGUAL SIGN

NRCAN C860 Compliant

LED 120/347VAC Input



### Approvals:

CSA Certified to C22.2 #141.15 and C860

### DESCRIPTION

The SLESE/SLSEE series of commercial edgelit bilingual exit and sortie signs lends style and prestige to any application. The SLESE/SLSEE series has been designed to meet the C860 standard while providing an elegant, high-end look. They come standard with long-life, high brightness energy efficient LEDs, with energy consumption as low as 7.8W AC. The SLESE/SLSEE series is available in recessed ceiling or surface ceiling mounting. The recessed ceiling backboxes come complete with hanger bars for T-bar type ceilings. Available in AC only, AC/DC and self-powered models.

### CIRCUITRY - AC & AC/DC

- LED ultra bright light source
- 120/347VAC Input, field selectable
- Emergency DC wattages as follows:  
**6VDC** = 4.0W **12VDC** = 7.0W **24VDC** = 17.0W


### CIRCUITRY - SELF-POWERED

- LED ultra bright light source
- 120/347VAC Input, field selectable
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration (standard)
- Solid state transfer and battery charger

### MECHANICAL

- High clarity, clear acrylic faceplate
- Screened on exit lettering/stencil
- Field installable peel on/off universal directional chevrons/arrows
- Chassis, backbox and painted finish trims are constructed of steel; other finish trims and backboxes are made from high grade aluminum or brass, depending on finish
- All electronics and faceplate mounted to single chassis for rapid and simple installation
- Separate backbox/housing can be pre-installed at any time prior to faceplate and electronics
- Recessed ceiling models include backbox with integral T-bar ceiling mounting supports
- White powder coat finish standard, other finishes and colours optional

### DIMENSIONS

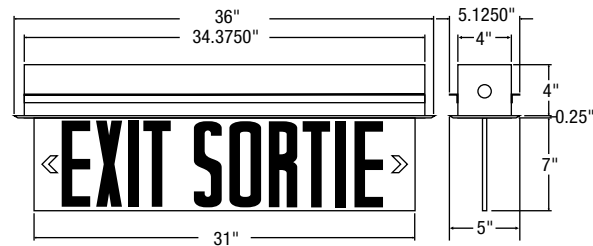

### ORDERING GUIDE

Series	Nbr of faces	Mounting	Letter/Face colour	Colour	DC Voltage	Options†
SLESE - Exit-Sortie SLSEE - Sortie-Exit	1 - Single face 2 - Double face	RC - Recessed ceiling SC - Surface ceiling	RDCL - Red on clear (Single face only) RDWH - Red on white RDMR - Red on mirror	WH - White BK - Black BA - Brushed aluminum SP - Custom colour (specify)	06VDC - 6VDC 12VDC - 12VDC 24VDC - 24VDC NDC - AC only IB - Self powered for 90 minutes	OP

† For detailed options descriptions, please consult the options page.