

# SLESX-SLSEX

## EXTRUDED ALUMINUM BILINGUAL SIGN

NRCAN C860 Registered

LED 120/347VAC Input



### Approvals:

CSA Certified to C22.2 #141.15, C860

### DESCRIPTION

The clean lines of the SLESX-SLSEX series of commercial extruded aluminum bilingual exit and sortie signs present a fully modern appearance and utilize a C860 approved lettering/stencil. Ideal for use in facilities required to meet current bilingual code requirements such as airports or government buildings and institutions. Available in AC only, AC/DC and internally self-powered versions.

### CIRCUITRY - AC & AC/DC

- LED ultra bright light source
- 120/347VAC Input, field selectable
- 3.1W power consumption single or double face
- Emergency DC wattages as follows:  
**6VDC = 2.2W 12VDC = 3.2W 24VDC = 6.7W**


### CIRCUITRY - SELF-POWERED

- LED ultra bright light source
- 120/347VAC Input, field selectable
- 9.0W power consumption single or double face
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration (standard)  
 120 minutes emergency duration is optional
- Solid state transfer and battery charger

### MECHANICAL

- Extruded aluminum construction
- Slide in/out captive faceplate(s) and backplate for rapid and simplified installation
- Snap out directional chevrons/arrows
- Universal spider knockout pattern stamped into backplate for junction box mounting
- Universal models include ceiling or end mount, field installable canopy kit c/w spider plate
- White powder coat finish standard, other finishes and colours optional

### DIMENSIONS

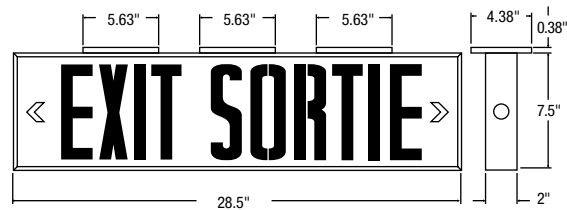

### ORDERING GUIDE

Series	Approval	Nbr of faces	Colour	Mounting	DC Voltage	Options†
SLESX - Exit SLSEX - Sortie	C - C860 certified	1 - Single face 2 - Double face	WH - White BK - Black GY - Grey BA - Brushed aluminum SP - Custom colour (specify)	CM - Ceiling mount WM - Wall mount EM - End mount*	UDC - 6, 12, 24V universal DC NDC - AC only IB - Self powered for 90 min. IB1 - Self powered for 120 min.	OP, TP, WG**, PG, K5

† For detailed options descriptions, please consult the options page.

\* End mount models include a support bracket to be mounted underneath the sign against the wall to prevent sagging. Allow for 3" underneath the sign.

\*\* Specify mounting.