

SLEXE-SLSRE

EDGELIT

NRCan C860 Registered
Recessed or Surface Mount
LED 120/347VAC Input



Approvals:
CSA Certified to C22.2 #141.15 and C860



DESCRIPTION

The SLEXE/SLSRE series of commercial edgelit signs provides interiors with a clean, distinguished appearance. Mounting is available in a variety of versions including: recessed ceiling, surface ceiling, surface wall and surface end. The acrylic faceplate can be matched to interiors with a choice of backings: clear (single face), white or mirrored. The SLEXE/SLSRE series is available in AC only, AC/DC and internally self-powered versions.

CIRCUITRY - AC & AC/DC

- LED ultra bright light source
- 120/347VAC Input, field selectable
- 4.0W power consumption single or double face
- Emergency DC wattages as follows:
6VDC = 1.5W 12VDC = 2.0W 24VDC=3.0W


CIRCUITRY - SELF-POWERED

- LED ultra bright light source
- 120/347VAC Input, field selectable
- 7W power consumption single or double face
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration (standard)
- Solid state transfer and battery charger

MECHANICAL

- High clarity, clear acrylic faceplate
- Screened on exit lettering/stencil
- Field installable peel on/off universal directional chevrons/arrows
- Chassis, backbox and painted finish trims are constructed of steel; other finish trims and backboxes are made from high grade aluminum or brass, depending on finish
- All electronics and faceplate mounted to single chassis for rapid and simple installation
- Separate backbox/housing can be pre-installed at any time prior to faceplate and electronics
- Recessed ceiling models include backbox with integral T-bar ceiling mounting supports
- White powder coat finish standard, other finishes and colours optional

DIMENSIONS

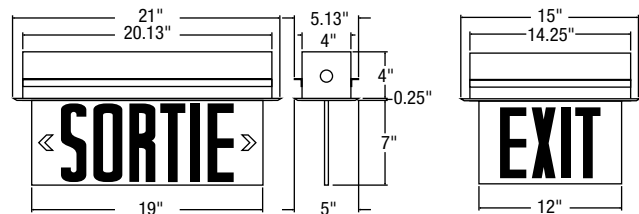

ORDERING GUIDE

Series	Approval	Faces	Mounting	Colour	DC voltage	Face/Letter colour	Options†
SLEXE - Exit SLSRE - Sortie	C - C860 certified	1 - Single face 2 - Double face	RC - Recessed ceiling SC - Surface ceiling SW - Surface wall SE - Surface end PM - Pendant mount	WH - White (standard) BK - Black BA - Brushed aluminum SP - Custom colour (specify)	NDC - AC only IB - Self-powered for 90 minutes IB2 - Self-powered for 180 minutes	CR - Red on clear (single face only) WR - Red on white MR - Red on mirror	OP

† For detailed options descriptions, please consult the options page.