

SLEXH

HAZARDOUS LOCATION EXIT

Class I, Division II / Zone 2 Group C + D

AC/DC & Self-Powered

120/347VAC Input



Approvals:

CSA C860 Approved and CSA C22.2 #137 Hazardous Location
Approved Class I, Division II / Zone 2, Groups C and D.
CSA C22.2 #141.15 Performance Certified



(self powered version)

DESCRIPTION

The SLEXH series of Class I, Division II/Zone 2 rated exits is designed to perform in demanding hazardous applications. The unit maintains its sealed interior with a continuous integral gasket. As well any LED pilot light or test switch are sealed type.

ELECTRICAL - AC/DC

- LED ultra bright light source
- 120/347VAC Input, field selectable
- 2.8W power consumption single face
- Emergency DC wattages as follows:
6VDC = 1.9W 12VDC = 2.9W 24VDC = 7W


CIRCUITRY - SELF-POWERED

- LED ultra bright light source
- 120/347VAC Input, field selectable
- 9.5W power consumption Single face
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration (standard)
- Solid state transfer and battery charger

MECHANICAL

- Heavy-duty non-metallic, reinforced construction
- One piece, molded and gasketed lens
- Removable directional chevrons/arrows
- Bottom hinged cover secured with two screws
- One-way breather valve for release of gases and/or moisture condensation
- All external metal hardware is stainless steel and steel screws
- Single face, wall mount only
- Grey finish housing, white faceplate standard

DIMENSIONS

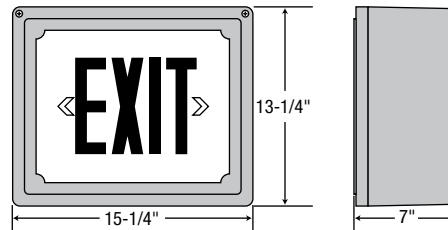

ORDERING GUIDE

SLEXH	1	GY	
Series	Nbr of faces	Colour	Operation
SLEXH	1 - Single face	GY - Grey	UDC - 6, 12, 24 universal DC IB - Self-powered for 90 minutes

TEMPERATURE CODES

UDC	IB
T6	T5