

SLEXV-SLSRV

VANDAL RESISTANT
 NRCan C860 Registered
 LED 120/347VAC Input



Approvals:
 CSA Certified to C22.2 #141.15 and C860

DESCRIPTION

The SLEXV/SLSRV series is designed to withstand extremely abusive environments like correctional facilities and schools. The signs are constructed from 16 gauge steel with an integral Lexan shield. Available in AC only, AC/DC and internally self-powered versions.

CIRCUITRY - AC & AC/DC

- LED ultra bright light source
- 120/347VAC Input, field selectable
- **EXIT:** 2.9W **SORTIE:** 5.8W power consumption single or double face
- **EXIT** emergency DC wattages as follows:
6VDC = 1.9W **12VDC** = 2.8W **24VDC** = 7.0W
- **SORTIE** emergency DC wattages as follows:
6VDC = 2.2W **12VDC** = 2.6W **24VDC** = 4.4W


CIRCUITRY - SELF-POWERED

- LED ultra bright light source
- 120/347VAC Input, field selectable
- **EXIT:** 2.9W / **SORTIE:** 4.3W power consumption single or double face
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration (standard)
 120 minutes emergency duration is optional
- Solid state transfer and battery charger

MECHANICAL

- 16 Gauge heavy-duty steel construction standard
- Solid and durable wrap-around faceplate design
- Snap out directional chevrons/arrows
- Integral Lexan polycarbonate shield behind full steel faceplate to prevent punch through
- Stainless steel, vandal-proof screws standard
- Universal spider knockout pattern stamped into backplate for junction box mounting
- Full width/height, ceiling or end mount canopy
- White powder coat finish standard, other finishes and colours optional

DIMENSIONS

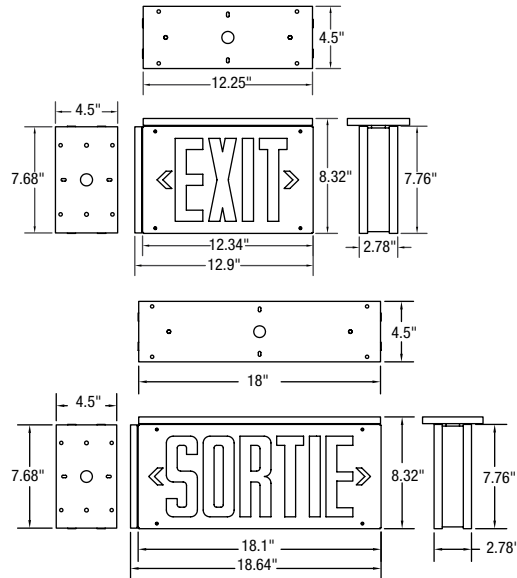

ORDERING GUIDE

Series	Nbr of faces	Mounting*	Colour	DC Voltage	Options†
SLEXV - Exit SLSRV - Sortie	1 - Single face 2 - Double face	CM - Ceiling mount WM - Wall mount EM - End mount	WH - White (standard) BK - Black GY - Grey SP - Custom colour (please specify)	BLANK - AC only UDC - Universal DC backup voltage 6, 12 or 24VDC selectable IB - Self-powered for 90 minutes IB1 - Self-powered for 120 minutes	WG**, OP, TPX, 14GA

† For detailed options descriptions, please consult the options page.

* Must be specified, canopy is factory installed.

** Specify mounting.