

SLEXY-SLSRY

HAZARDOUS LOCATION

Class I, Division I, Group C + D

AC, AC/DC

120/347VAC Input

SP Approvals:
CSA Certified to C22.2 #137, 141.15



DESCRIPTION

The SLEXY and SLSRY series of hazardous location exit signs is designed to meet and exceed the most stringent code requirements. The housings are made from copper free, heavy-duty die cast aluminum. The frame and faceplate(s) are manufactured in heavy gauge steel with a white, baked powder coat finish. The signs can be specified to suit a variety of mounting options including ceiling, wall and pendant mount.



CIRCUITRY

- Input voltages 120VAC or 347VAC
- Emergency back-up voltage: 6V, 12V or 24VDC

MECHANICAL

- Die cast, copper free aluminum, white or raw aluminum finish
- Steel exit sign, white powder coat finish standard
- Snap out directional chevrons/arrows
- Wiring pre-pulled through fixture
- Wall and ceiling models c/w integrated die cast junction box
- Junction box c/w oversized integral mounting holes and tapped and plugged rigid holes
- Comes with a transfer panel for hazardous locations (for AC/DC versions)
- TSFN enclosure must be installed/located outside the classified hazardous location
- Temperature code: T6

DIMENSIONS

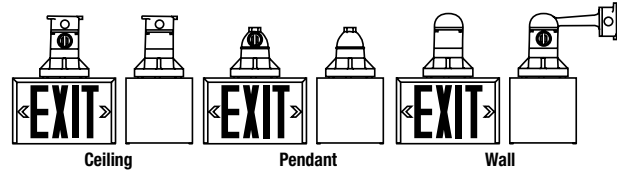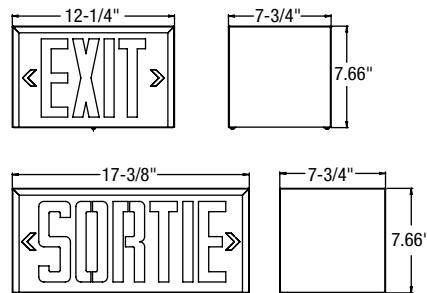

ORDERING GUIDE

Series	Nbr of faces	Class	Division	Group	DC Voltage	Mounting	Options†
SLEXY - Exit	1 - Single	1	1	C	Blank - AC only	CM - Ceiling mount	OP, TSFN
SLSRY - Sortie	2 - Double			D	06 - 6V 12 - 12V 24 - 24V	PM - Pendant mount WM - Wall mount	

† For detailed options descriptions, please consult the options page.