

SLP-2

PLASTIC BATTERY UNIT 6VDC Output / 120VAC Input

Approvals:
 CSA Certified to C22.2 #141

DESCRIPTION

The SLP-2 series of plastic battery units utilizes a modern design with two fully adjustable, high output head assemblies. The SLP-2 series is available configured with 6VDC output, 30W capacity for 30 minutes duration.

CIRCUITRY

- 120/347VAC 60Hz Input, field selectable
- Solid state variable rate charger
- 6VDC emergency power output
- 30W output capacity, small housing
- 30 minutes emergency power duration standard
- Momentary push button test switch
- Pilot LED for AC ON status
- Fully automatic, current limited charger
- Line latched, low voltage protection
- Short circuit protection
- Complete battery recharge in 24 hours
- Maintenance free, sealed lead acid battery
- 347VAC available in white only




MECHANICAL

- High impact, UV stabilized, thermoplastic construction
- Two fully adjustable square lamp heads
- Two 9W wedge base incandescent lamps
- Universal spider knockout pattern and keyhole mounting slots stamped into back of cabinet
- Unit "quick snaps" onto backplate for simple, speedy installation
- White color is standard, black is optional

Note: Not intended for flush ceiling mount

DIMENSIONS

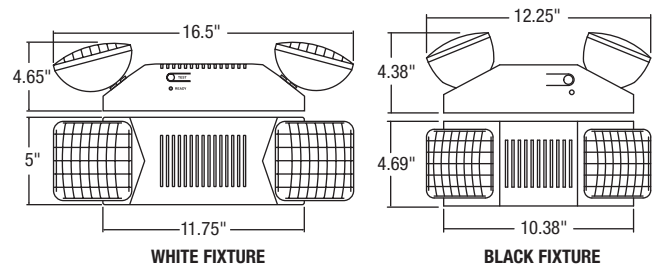

ORDERING GUIDE

SLP-2 /	
Series	Options
SLP-2	BK - Black LT - Laser remote test

MODEL RATING

Model	Voltage	Wattage capacities	
		30 min.	60 min.
SLP-2	6VDC	30	15