

SLSR

RECESSED CEILING BATTERY UNIT

6VDC Output/120/347VAC Input

PAR36 Lamp



Approvals:
CSA Certified to C22.2 #141.15

DESCRIPTION

The SLSR series of commercial recessed ceiling battery units is designed to blend seamlessly with contemporary decors. The housing mounts above suspended or drywall ceilings, leaving only the trim plate visible. The SLSR series is available configured with 6VDC output voltage with 36W capacity for 30 minutes duration. Units can be fitted with a range of lamp types and wattages.


CIRCUITRY

- 120/347VAC 60Hz Input, field selectable
- High efficiency, rapid recovery, precision control charging system
- 6VDC emergency power output voltage
- 30 minutes emergency power duration standard
- Momentary push button test switch
- Diagnostic/pilot LED for AC ON
- Fully automatic, current limited charger
- Line latched, low voltage protection
- Brownout and short circuit protection
- Temperature compensated
- Complete battery recharge in 24 hours
- Maintenance free, sealed lead acid battery

MECHANICAL

- Steel trim plate and lamp assembly
- Lightweight aluminum backbox recesses completely above ceiling
- Removable plaster ring with integral T-bar hanger bar slots (hanger bars not supplied)
- Wiring pre-pulled into top mounted electrical box
- Lamp assembly wiring attached with quick-connect snap connector
- Adjustable gimbal mounted lamp
- White trim paint finish is standard, other colors are optional

DIMENSIONS

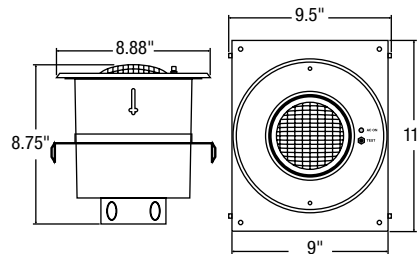

ORDERING GUIDE

Series	Voltage	Wattage	Lamp assembly	Lamp type	Color
SLSR	06 - 6VDC	036 - 36W	1 - One lamp	See lamp selection below	WH - White BK - Black SP - Custom color (specify)

LAMP SELECTION

6 Volts	
PAR36 - Large head	
Quartz halogen	08Q, 10Q, 12Q, 20Q
Tungsten	7.2T, 09T, 18T, 25T
Quartz sealed beam	08SBQ, 12SBQ, 20SBQ
Tungsten sealed beam	08SBT, 09SBT, 12SBT, 18SBT, 30SBT
LED	4LR