

SPEXP-2

PLASTIC COMBO EXIT
 NRCAN C860 Registered
 LED 120/347VAC Input



Approvals:
 CSA Certified to C22.2 #141.15 and C860

DESCRIPTION

The SPEXP-2 series of commercial plastic signs is designed using durable and lightweight high impact thermoplastic. Signs and canopy quick snap together for speedy installations. Available in AC only, AC/DC and internally self-powered versions.


CIRCUITRY

- LED ultra bright light source
- 120/347VAC Input, field selectable
- 2.7W power consumption for LED exit portion of combination sign
- LED Emergency DC wattage 6VDC = 0.9W
- 6VDC emergency power output
- Wattage capacity 30W
- 30 minutes emergency power duration standard
- Two 9W tungsten lamps standard
- Momentary push button test switch
- Diagnostic/pilot LED for AC ON
- Fully automatic, current limited charger
- Solid state design and construction with brownout and short circuit protection
- Temperature compensated
- Maintenance free, sealed lead acid battery

MECHANICAL

- High impact, UV stabilized, thermoplastic construction
- Quick snap faceplates, backplate and universal canopy for rapid and simple installation
- Snap out directional chevrons/arrows
- Universal spider knockout pattern stamped into backplate for junction box mounting
- Universal models include ceiling or end mount, field installable canopy kit c/w spider plate
- White colour is standard
- Fully adjustable, high impact thermoplastic square heads are standard

DIMENSIONS

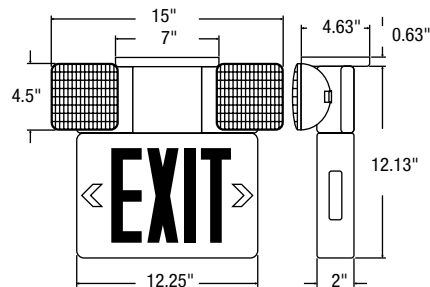

ORDERING GUIDE

SPEXP-2

Series

SPEXP-2

MODEL RATINGS

Model	Voltage	Wattage capacities			
		30 min.	60 min.	90 min.	120 min.
SPEXP-2	6V	30	15	10.8	7.5