

SPEXX/SPSRX

EXTRUDED ALUMINUM COMBO

NRCan C860 Registered

LED 120/347VAC Input



Approvals:

CSA Certified to C22.2 #141.15, C860

Energy Verified
Energy Verified



DESCRIPTION

The SPEXX/SPSRX series of commercial combination extruded signs and battery units features a fully modern appearance. The extruded aluminum design provides for a rigid, durable and lightweight sign. Two PAR18 small style, front mounted heads are standard, PAR36 large style or MR16 type are optional.


CIRCUITRY

- LED ultra bright light source
- 120/347VAC Input, field selectable
- 1.9W power consumption for LED exit portion of combination sign
- LED Emergency DC wattages as follows:
EXIT: 6VDC = 1W 2VDC = 1.4W SORTIE: 6VDC = 1.3W 12VDC = 1.4W
- 6VDC or 12VDC emergency power output versions (as specified)
- Wattage capacities from 36 to 72W
- 30 minutes emergency power duration standard
- Momentary push button test switch
- Diagnostic/pilot LEDs for AC ON and CHARGE
- Fully automatic, current limited charger
- Line latched, low voltage protection
- Solid state design and construction with brownout and short circuit protection
- Temperature compensated
- Maintenance free, sealed lead acid battery

MECHANICAL

- Extruded aluminum construction exit sign
- Slide in/out captive faceplate(s) and backplate for rapid and simplified installation
- Snap out directional chevrons/arrows
- Universal spider knockout pattern stamped into backplate for junction box mounting
- Universal models include ceiling or end mount, field installable canopy kit c/w spider plate
- Multiple conduit entry knockouts
- White powder coat finish standard, other finishes and colours optional
- Front head mounting is standard, exit side mount is optional

DIMENSIONS

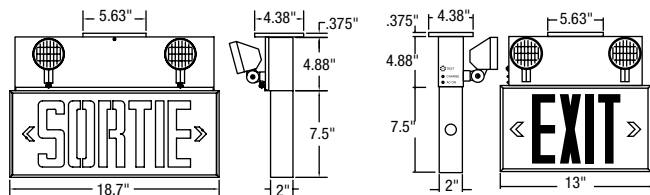

ORDERING GUIDE

Series	Voltage	Wattage	Nbr of faces	Head	Lamp	Options ¹
SPEXX - (Exit)	6 - 6V	See rating chart below	1 - Single face 2 - Double face	00 - No heads	1L - 1 PAR36	See lamp selection chart below
SPSRX - (Sortie)	1 - 12V			1N - 1 PAR18 (std) 2N - 2 PAR18 (std) 1S - 1 MR16 2S - 2 MR16	2L - 2 PAR36 1M - 1 MR16 2M - 2 MR16	
C860 certified						

†For detailed options descriptions, please consult the options page. * Specify AC voltage. ** Specify mounting.

LAMP SELECTION

	6 Volts	12 Volts
PAR18 - Small head		
LED	3LJ, 4LJ, 5LA	3LJ, 4LJ, 5LA, 6LA, 7LA
Quartz halogen	08Q, 10Q, 12Q	08Q, 10Q, 12Q
Tungsten	09T	18T
MR16 - Small head c/w MR16 Lamp		
LED	4LR, 5LA	4LR, 5LA, 6LA, 7LA
Quartz halogen	08Q, 10Q, 12Q, 20Q	08Q, 10Q, 12Q, 20Q, 35Q
PAR36 - Large head		
Quartz halogen	08Q, 10Q, 12Q, 20Q	08Q, 10Q, 12Q, 20Q
Tungsten	09T, 18T, 25T	09T, 18T, 25T
Quartz sealed beam	08SBQ, 10SBQ, 12SBQ	08SBQ, 12SBQ
Tungsten sealed beam	09SBT, 18SBT	

MODEL RATINGS

Model	Voltage	Wattage capacities			
		30 min.	60 min.	90 min.	120 min.
SPEXX6036	6V	36	18	12	9
SPEXX6050	6V	50	25	16	12
SPEXX1036	12V	36	18	12	9
SPEXX1050	12V	50	25	16	12
SPEXX1072	12V	72	36	24	18
SPSRX6036	6V	36	18	12	9
SPSRX6050	6V	50	25	16	12
SPSRX1036	12V	36	18	12	9
SPSRX1050	12V	50	25	16	12
SPSRX1072	12V	72	36	24	18

