

**New product**

## CM-Edge Series

Aluminum edge-lit pictogram sign




### Features

- Aluminum frame and polycarbonate panels illuminated by high efficiency LEDs
- Universal side, wall and ceiling mount
- Universal single and double face
- 3 pictogram panels included: 1 with no arrow and 2 with arrows
- 120-347VAC 50/60Hz input
- 3.6V Nickel-cadmium battery offering 120 minutes of emergency lighting
- Red LED charger monitor and momentary test switch (self-powered model)
- CSA C22.2 no.141-15 certified
- **Warranty details at: [www.emergi-lite.ca](http://www.emergi-lite.ca)**

### Dimensions

Dimensions are approximate and subject to change.

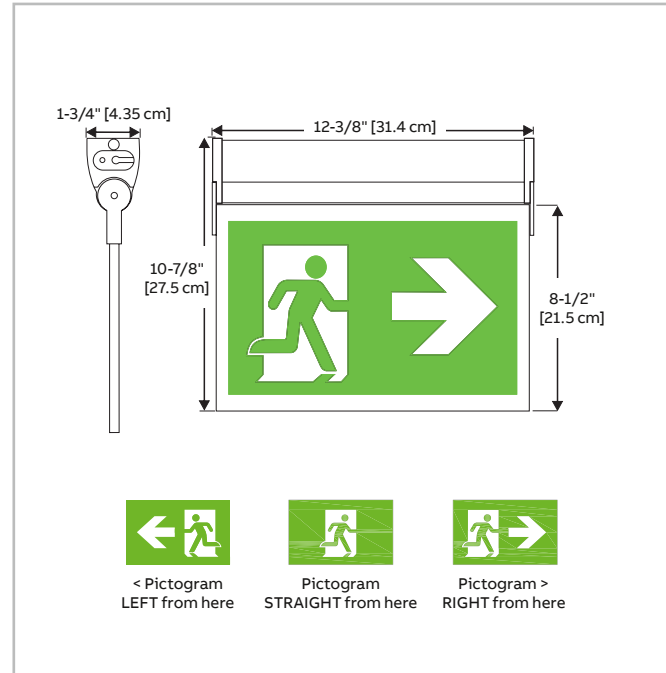

### Power consumption and unit rating

Model	AC specs		
	Input wattage (AC/SP)	Current (AC/SP)	Efficiency (AC/SP)
CM-EDGE-E	120V, 50/60Hz	2W/3W	0.01A/0.24A
	277V, 50/60Hz	2W/3W	0.007/0.014A
	347V, 50/60Hz	3W/4W	0.01A/0.017A

### Ordering information

Series	Voltage	Brand
CM-EDGE	-AC= 120VAC-347VAC -SP=120VAC-347VAC, self-powered (120 minutes)	-E= Emergi-Lite®

Example: CM-EDGE-AC-E

**EMERGI-LITE**