

New product

CM-SS Series

Steel pictogram sign




Features

- Steel housing and polycarbonate panel illuminated by high efficiency LEDs
- Universal side, wall and ceiling mount
- Universal single and double face
- 3 pictogram panels included: 1 with no arrow and 2 with arrows
- 120-347VAC 50/60Hz input
- Nickel-cadmium battery offering 120 minutes of emergency lighting
- Red LED charger monitor and momentary test switch (self-powered model)
- CSA C22.2 no.141-15 certified
- **Warranty details at: www.emergi-lite.ca**

Dimensions

Dimensions are approximate and subject to change.

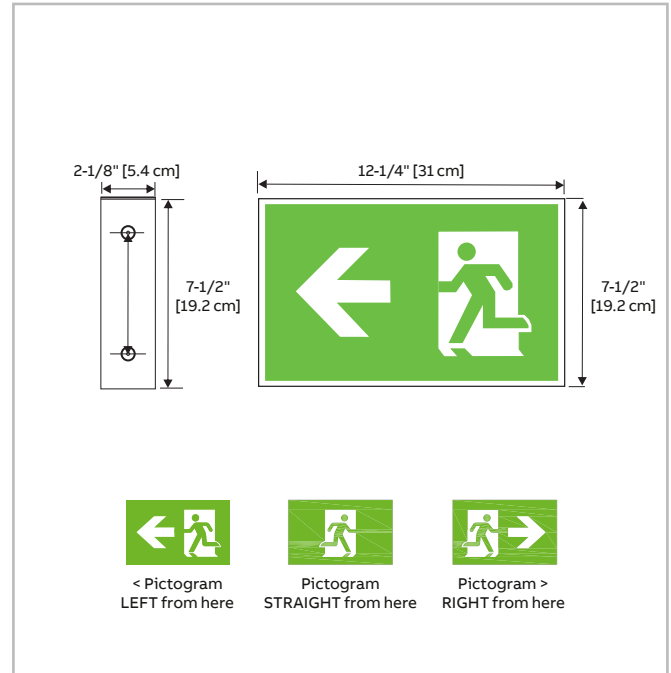

Power consumption and unit rating

| Model | AC specs | | |
|---------|-----------------------|-----------------|--------------------|
| | Input wattage (AC/SP) | Current (AC/SP) | Efficiency (AC/SP) |
| CM-SS-E | 120V, 50/60Hz | 2W/3W | 0.01A/0.02A |
| | 277V, 50/60Hz | 2.1W/3.2W | 0.009A/0.013A |
| | 347V, 50/60Hz | 3W/4W | 0.01A/0.017A |

Ordering information

| Series | Voltage | Brand |
|--------|---|------------------|
| CM-SS | -AC= 120VAC-347VAC -SP=120VAC-347VAC, self-powered (120 minutes) | -E= Emergi-Lite® |

Example: CM-SS-AC-E