



# Distinction™

## Surface Designer Series

Type: \_\_\_\_\_

Project/Location: \_\_\_\_\_

Contractor: \_\_\_\_\_

Prepared By: \_\_\_\_\_

Date: \_\_\_\_\_

Model No.: \_\_\_\_\_


### FEATURES

- Contemporary, enduring design
- Available in 1, 2 or 3 head configurations
- Highly resistant powder-coated, Die-Cast aluminum construction
- MR16 halogen lamps: 6W, 10W, 12W, 20W, 35W and 50W  
MR16 LED lamps: 4W and 5W
- CSA certified to C22.2 No. 141-15



### DIMENSIONS

Dimensions are approximate and subject to change.

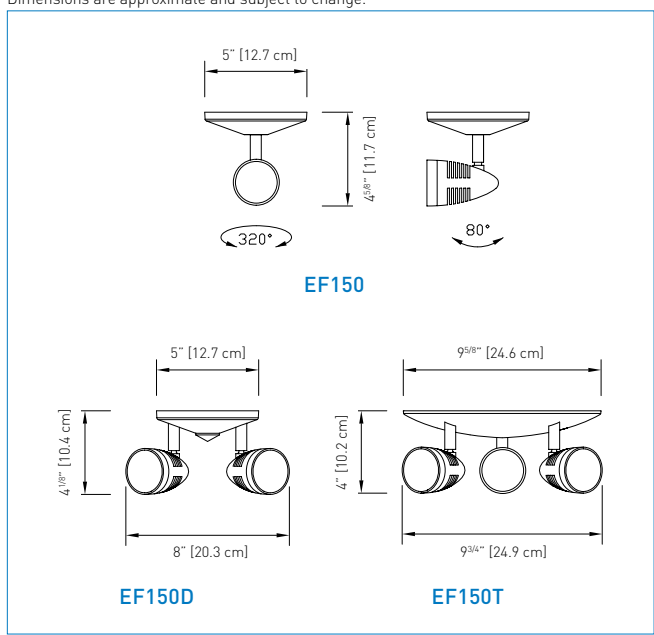

### TYPICAL SPECIFICATIONS

The contractor will supply and install **Emergi-Lite® Distinction Series** remote heads. These remote heads will consist of either single, double or triple head configurations according to the design. Remote heads will be constructed of durable powder coated, Die-Cast aluminum and use MR16 halogen light sources. The remote fixtures shall be certified to CSA C22.2 No.250. The unit shall be **Emergi-Lite®** model: \_\_\_\_\_.

### WIRE GUARDS

460.0029-E	Wall Mount (EF150)
460.0032-E	Wall Mount (EF150D)
460.0078-E	Wall Mount (EF150T)

### REPLACEMENT LAMPS

MODEL	LAMP TYPE	VOLTAGE-WATTAGE
580.0074-E	MR16 flood	6V-6W
580.0080-E	MR16 flood	12V-12W
580.0077-E	MR16 flood	24V-20W
580.0097-E	MR16 LED	6V-4W
580.0093-E	MR16 LED	12V-4W
580.0095-E	MR16 LED	120V-4W
580.0098-E	MR16 LED	24V-4W
580.0100-E	MR16 LED	24V-6W
580.0104-E	MR16 LED	12V-5W
580.0106-E	MR16 LED	12V-6W

For the complete list, please see the lamp chart on pages 156 to 158

### ORDERING INFORMATION

SERIES	# OF HEADS	COLOUR	VOLTAGE/WATTAGE
EF150= closed	Blank= one head D= two heads T= three heads	Blank= white -B= black	-6V6W= MR16, 6V-6W -6V10W= MR16, 6V-10W -12V12W= MR16, 12V-12W -12V20W= MR16, 12V-20W -12V35W= MR16, 12V-35W -12V50W= MR16, 12V-50W -24V12W= MR16, 24V-12W -24V20W= MR16, 24V-20W -24V35W= MR16, 24V-35W -24V50W= MR16, 24V-50W -LAC= MR16 LED, 6V-4W -LGC= MR16 LED, 12V-4W -LIC= MR16 LED, 12V-5W -LLC= MR16 LED, 24V-4W -LJC= MR16 LED, 12V-6W -LMC= MR16 LED, 24V-6W -LVC= MR16 LED, 120V-4W -20H= MR16 IR, 12V-20W -35H= MR16 IR, 12V-35W

EXAMPLE: EF150MD