

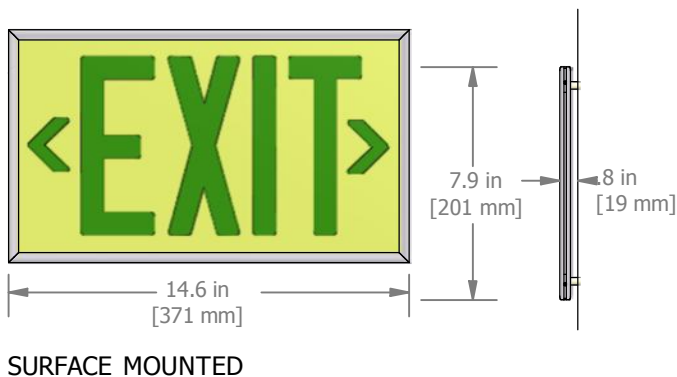


Photoluminescent Exit Sign System 50 ft. Visibility

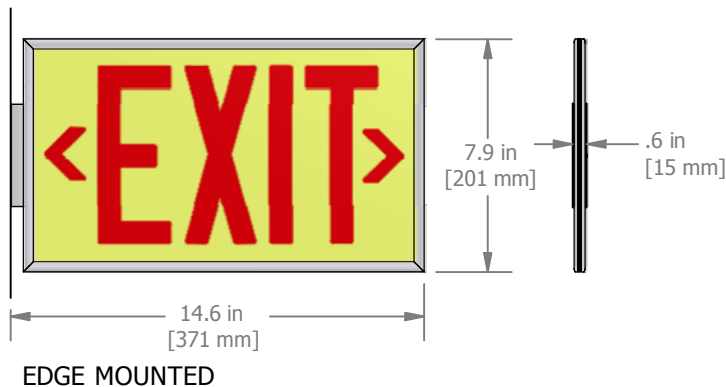

- * Visible for 50 feet
- * No electricity or batteries required
- * Requires exposure to at least 54 LUX (5-ft candles) of fluorescent, metal halide or mercury vapor light illumination for a minimum of 60 minutes to become fully operational.
- * Directional arrow labels provided with each sign for on-site application
- * Installs indoors only
- * Product uses recycled aluminum and is recyclable
- * Safe to use since it is not toxic and not radioactive

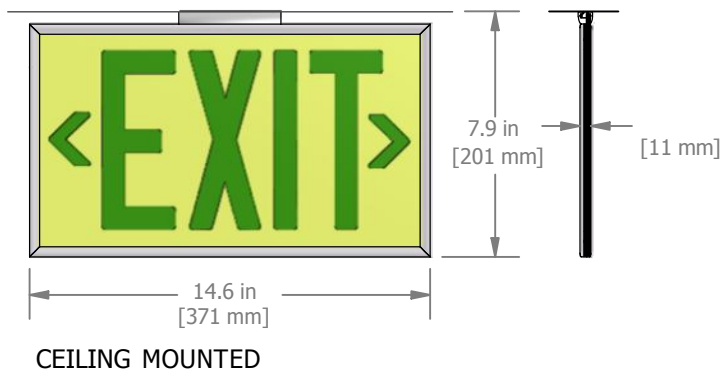

RETRO FIT INSTALLATION



SLOPED CEILING MOUNTED

Part Number	Dimensions	Description
EX353183-50R OR EX353183-50G	13.9" x 7.2" (353mm x 183mm)	One-Sided Exit Sign EX353183-50. Red Letters Only in Canada.
EX371201-50R-CA OR EX371201-50G-CA	14.6" x 7.9" (371mm x 201mm)	One-Sided Exit Sign EX353183-50 with Clear Anodized Aluminum Frame and Universal Mounting Hardware. Red Letters Only in Canada.
2X-EX371201-50R-CA OR 2X-EX371201-50G-CA	14.6" x 7.9" (371mm x 201mm)	Double-Sided Exit Sign EX353183-50 with Clear Anodized Aluminum Frame and Universal Mounting Hardware. Red Letters Only in Canada.