

# Forma Exit Die-Cast LED Exit

Job/Location: \_\_\_\_\_

Contractor: \_\_\_\_\_ Prepared By: \_\_\_\_\_

Model Number: \_\_\_\_\_ Date: \_\_\_\_\_



## EXTERNAL SPECIFICATIONS

The **FORMA** series is constructed from durable die-cast aluminum. The **FORMA** comes standard with a brushed aluminum faceplate(s) and black housing. Available in custom epoxy-based powder coat finishes (please specify). Universal mounting pattern is stamped into the back plate. Removable chevrons are standard on each unit. The self-powered LED version comes standard with an external LED status indicator and test switch.

## INTERNAL SPECIFICATIONS

AC ONLY, AC/DC and SELF-POWERED comes standard configured with high-output LED technology and 120/347VAC input. Nickel-cadmium batteries provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger & transfer. CSA 22.2 No. 141-15 Performance Certified.


## ORDERING INFORMATION

Series	Operation	Light Source	Letter Colour	Face#	Mounting	Options
FM-E (Exit)	Blank (AC only)	L (LED)	R (Red)	1 (Single)	W (Wall mount, no canopy)	CF (Curved face)
	SP (Self-powered)		G (Green)	2 (Double)	M (Universal mount, wall, ceiling or end)	WW (White face, white body)
				U (Universal)		BB (Black face, black body)
						CC (custom colour - specify)
						BA (Brushed aluminum body)
						AT (Auto-test, SP only)
						SW (Special wording)
						WG (Wireguard)
						TP (Tamper proof screws)
						PK12 (12" pendant kit)
						UDC (6 - 24VDC)
						90SP (90 minute emergency)
						120SP (120 minute emergency)
						DL (Damp Location)

EXAMPLE: FME-SP-L-R-1-W

DESCRIPTION: Forma die-cast aluminum, 120/347VAC input, self-powered, red, LED, single face, wall mount

**DIMENSIONS (MM, IN.)**

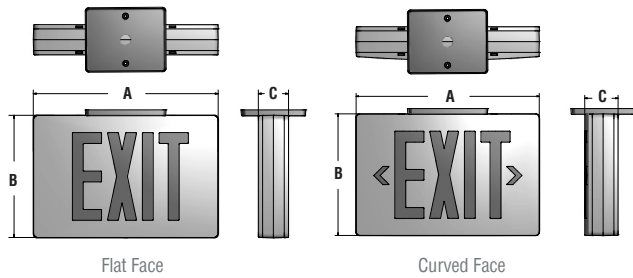

Model	A	B	C
Flat Face	317mm 12 1/2"	210mm 8 1/4"	51mm 2"
Curved Face	324mm 12 3/4"	216mm 8 1/2"	57mm 2 1/4"

**DIE-CAST DESIGN**

The excellent visual performance and an architecturally pleasing design make the **FORMA** series the premier choice for applications requiring the durability and the craftsmanship of die-cast aluminum exit signs. The standard brushed aluminum face blends well with any setting and provides a clean, modern look. The die-cast aluminum construction provides the **FORMA** with exceptional strength and rigidity.

**ELECTRICAL SPECIFICATIONS**

The **FORMA** series is configured with a high-output LED light source. Standard with 120/347VAC input. All LED versions are C860 approved and consume only 2W nominal power. Optional UDC emergency illumination is provided by the LED light source at the following wattages:

6VDC - 24VDC - 2 Watts

If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

**MECHANICAL SPECIFICATIONS**

The **FORMA** is constructed from durable die-cast aluminum. Universal mounting pattern is stamped on the back. Field removable directional chevrons are standard. The **FORMA** is supplied standard with a brushed aluminum face(s) and a black baked powder coat finished housing. Other colours are available, including custom colour matching, please specify. The faceplate is held securely in place with a screw and a pivot bracket system that allows for complete access to the interior of the sign.

**FACES**

The **FORMA** is standard with a flat face or available with a curved face [CF]. The optional curved face provides excellent visual performance and an architecturally pleasing design. The standard brushed face blends with any setting and provides a clean, contemporary look.

**INSTALLATION**

The **FORMA** is suitable for ceiling, wall and end mounting. Suitable or indoor installations.