



Standard Series Photoluminescent Exit Sign System

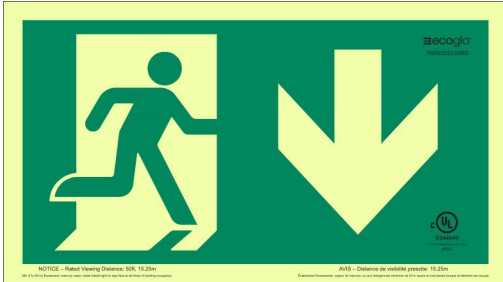

- LEED points qualified for energy conservation and sustainability
- ULC S572 listed for Photoluminescent and Self-Luminous Exit Signs
- 50/75 foot visibility rating
- No electricity or batteries required
- Requires exposure to at least 54 lux (5 foot-candles) of fluorescent, metal halide, mercury vapor, or other 4000K light illumination for a minimum of 60 minutes to become fully operational
- Indoor installation
- Standard twenty-five (25) year warranty
- Non-toxic and non-radioactive
- ULC testing/listing no. E344049/4RG2

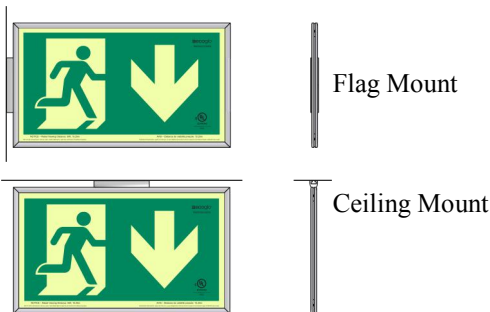

Sides and Direction

1-Sided

RD Right-facing running man with down arrow

LA Left-facing running man with arrow

RA Right-facing running man with arrow

2-Sided

SA Single direction with arrows

Model Selection:
RM-[Direction][Rating][Frame]

Visibility (feet)	Size framed (unframed)
50	411x241mm / 16.2x9.5" (393x223mm / 15.5x8.8")
75	498x296mm / 19.6x11.6" (480x278mm / 18.9x10.9")

Frame and mounting kit

(blank) No frame

-CA Clear anodized aluminum frame and mounting kit

- Example 1: **RM-RD50**
1-Sided, right-facing running man with down arrow, 50-foot, no frame
- Example 2: **RM-SA75-CA**
2-Sided, single direction with arrows, 75-foot, clear anodized aluminum frame and mounting kit

ISO Standard requires an arrow with the Running Man symbol at all times. Arrow points to direction of egress. Signs over doors have arrow pointing down.