

SLESS-SLSES

BILINGUAL STEEL SIGN

NRCAN C860 Registered

LED 120/347VAC Input



Approvals:

CSA Certified to C22.2 #141.15, C860

DESCRIPTION

The SLESS-SLSES series of commercial steel bilingual exit and sortie signs features a slim profile that eliminates light leaks combined with a simple to install design. Ideal for use in facilities required to meet current bilingual code requirements such as airports or government buildings and institutions. Available in AC only, AC/DC and internally self-powered versions.

CIRCUITRY - AC & AC/DC

- LED ultra bright light source
- 120/347VAC Input, field selectable
- 3.1W power consumption single or double face
- Emergency DC wattages as follows:
6VDC = 2.0W 12VDC = 3.2W 24VDC = 6.7W


CIRCUITRY - SELF-POWERED

- LED ultra bright light source
- 120/347VAC Input, field selectable
- 9.0W power consumption single or double face
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration (standard)
 120 minutes emergency duration is optional
- Solid state transfer and battery charger

MECHANICAL

- 20 gauge steel construction
- Slide out faceplates and backplates for rapid and simple installation
- Snap out directional chevrons/arrows
- Universal spider knockout pattern stamped into backplate for junction box mounting
- Universal models include ceiling or end mount, field installable canopy kit c/w spider plate
- Multiple conduit entry knockouts
- White powder coat finish standard, other finishes and colours optional

DIMENSIONS

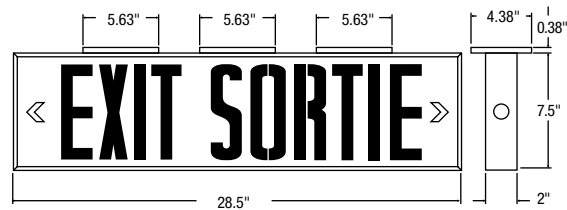

ORDERING GUIDE

Series	Nbr of faces	Mounting	Letter order	Colour	DC output	Options†
SLESS-SLSES 6" (CSA C860 Approved height)	1 - Single face 2 - Double face	CM - Ceiling mount WM - Wall mount EM - End mount*	ES - Exit Sortie SE - Sortie Exit	WH - White (standard) BK - Black GY - Grey SP - Custom colour (specify)	UDC - Universal DC backup voltage 6, 12 or 24VDC selectable IB - Self-powered for 90 minutes IB1 - Self-powered for 120 minutes	OP, TP, WG**, PG

† For detailed options descriptions, please consult the options page.

* End mount models include a support bracket to be mounted underneath the sign against the wall to prevent sagging. Allow for 3" underneath the sign.

** Specify mounting.