



SAF-T-RAY™ Series

NEMA-3R
Wall Mount Remote Head

Type: _____
 Project/Location: _____
 Contractor: _____
 Prepared By: _____
 Date: _____
 Model No.: _____

FEATURES

- Compact wall sconce unit for indoor and outdoor use
 - High impact resistant polycarbonate diffuser
 - Die-cast aluminum housing
 - For outdoor and indoor use
 - Adjustable lamps
 - Vandal resistant option
 - CSA Certified to C22.2 No. 141-15
- See warranty details at: www.tnb.ca/en/brands/lumacell



TYPICAL SPECIFICATIONS

Wall mount unit shall be gasketed die-cast aluminum housing, impact resistant polycarbonate diffuser. The lamps shall be in adjustable for aisle or area distribution. Fixture shall be supplied with gasket and shall be suitable for installation on any four inch octagonal box.

The remote fixtures shall be certified to CSA 22.2 No.141-15

The remote unit shall be Lumacell® model: SAF _____.

REPLACEMENT LAMPS

MODEL	LAMP TYPE	VOLTAGE/WATTAGE
580.0079-L	MR16 Flood	6V-10W
580.0080-L	MR16 Flood	12V-12W
580.0064-L	MR16 Flood	12V-20W
580.0068-L	MR16-IR Flood	12V-20W
580.0070-L	MR16 Flood	24V-12W
580.0097-L	MR16, LED	24V-20W
580.0093-L	MR16, LED	6V-4W
580.0104-L	MR16, LED	12V-4W
580.0106-L	MR16, LED	12V-5W
580.0098-L	MR16, LED	24V-4W
580.0100-L	MR16, LED	24V-6W


See the complete list p. 152-154.

WIRE GUARDS

460.0082-L	Wall Mount
------------	------------

DIMENSIONS

Dimensions are approximate and subject to change.

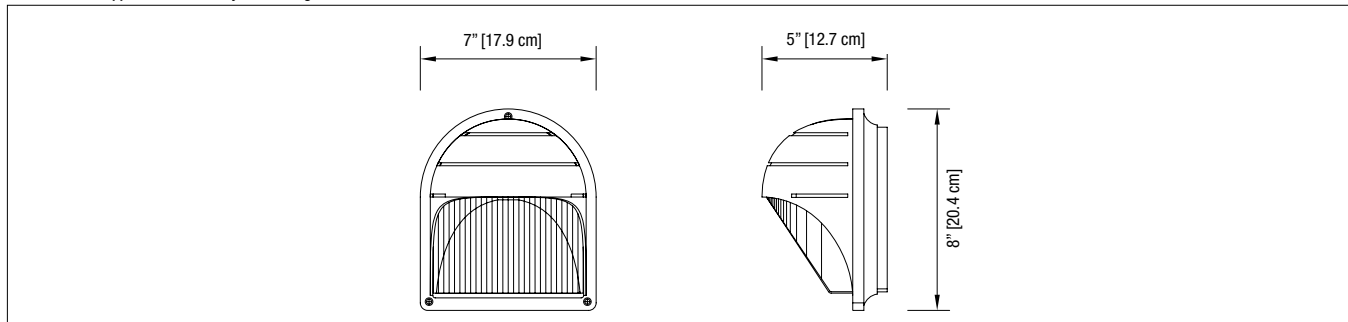

ORDERING INFORMATION

SERIES	LAMP TYPE	VOLTAGE/ WATTAGE	COLOUR	OPTIONS
SAF= exterior remote	Blank= (1) med. base socket only (max. 60W), no lamp included, for non low-voltage can be used for generator emergency M= MR16	Blank= no lamp LD1= 2X MR16 LED, 6V-4W LD7= 2X MR16 LED, 12V-4W LD9= 2X MR16 LED, 12V-5W LD10= 2X MR16 LED, 12V-6W LD13= 2X MR16 LED, 24V-4W LD14= 2X MR16 LED, 24V-6W LD25= 2x MR16 LED, 120V-4W 6V10W= 2X MR16 halogen, 6V-10W 12V12W= 2X MR16 halogen, 12V-12W 12V20W= 2X MR16 halogen, 12V-20W 12V20WH= 2X MR16-IR, 12V-20W, high output 24V12W= 2X MR16 halogen, 24V-12W 24V20W= 2X MR16 halogen, 24V-20W	Blank= factory white BK= black DB= dark bronze DG= dark grey	C= clear lens VR= vandal resistant screws*

EXAMPLE: SAFM12V12WDB