

Type: _____
 Project/Location: _____
 Contractor: _____
 Prepared By: _____
 Date: _____
 Model No.: _____

LER450 Series

Triangular Extruded Aluminum Exit Sign



FEATURES

- Rugged extruded aluminum housing
- Extruded aluminum faceplates
- White finish standard
- Standard field-selectable knockout chevrons
- Field-selectable knockout chevrons
- Long-life LED light source of **ALINGAP** technology assures low maintenance cost and is warrantied for ten (10) years
- Meets or exceeds CSA 22.2 No. 141-15

See warranty details at: www.tnb.ca/en/brands/lumacell



TYPICAL SPECIFICATIONS

Supply and install the **Lumacell® LER450 Series** of three-face LED Exit Signs. The equipment shall operate with universal AC input voltage of 120, 277 or 347VAC at less than 2 Watts and universal two-wire DC input voltage from 6VDC to 24VDC at less than 3.5 Watts. The housing shall be constructed of rugged extruded Aluminum painted with a factory white finish and shall have three face plates oriented symmetrically at 120 degrees in the horizontal plan.


The faceplates shall be constructed of extruded Aluminum and come standard with knockout chevrons. The light source shall be red light emitting diodes (LED) of long-life technology **ALINGAP**. An LED-sensitive diffuser shall be mounted behind the legend to provide the 6" high by 3/4" stroke letters with even illumination. Each legend shall be illuminated by one dedicated LED lamp (strip). The LED lamps shall be oriented: two downwards and one upwards and shall provide illumination in normal and emergency operation. Eventual failure of one LED lamp shall not affect the well-functioning of the other two lamps. The Exit Sign shall come standard with a pendant kit with a 3/8-in diameter pipe for ceiling-mount installation.

The Exit Sign shall be CSA 22.2 No.141-15 certified.

The equipment shall be **Lumacell®** Model: _____.

DIMENSIONS

Dimensions are approximate and subject to change.

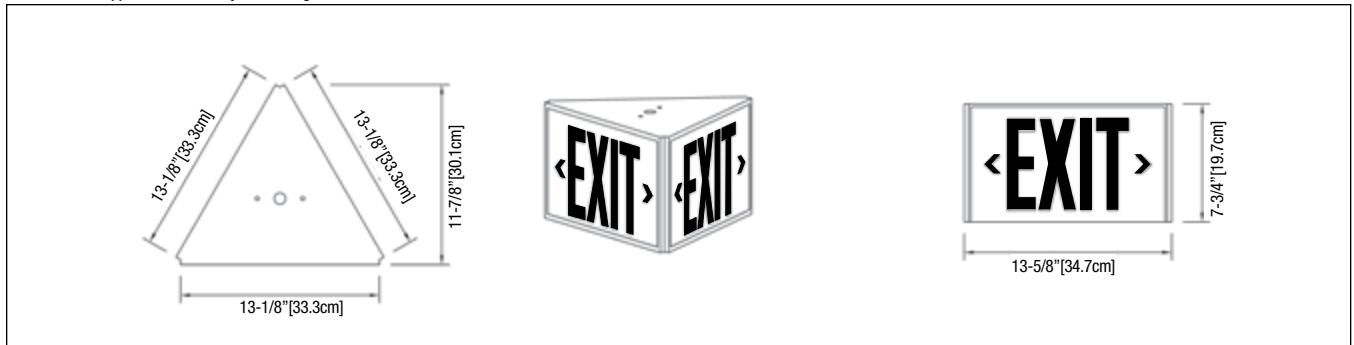

POWER CONSUMPTION AND UNIT RATING

MODEL	AC SPECS	DC SPECS
AC / DC - standard	120/277/347VAC Less than 2W	6 to 24VDC Less than 3.5W

ORDERING INFORMATION

SERIES	FACES/MOUNTING	COLOUR	VOLTAGE	OPTIONS
LER= exit extruded aluminum	4502S= 2 sided face (Wall mounting only) 4503S= 3 sided face (Pendant mounting only)	Blank= factory white	UNIV= 120/277/347VAC, 6 to 24VDC	TP= tamper-proof screws* *990.0119-L= tamper-proof bit (sold separately)

EXAMPLE: LER4503SUNIV